



2021

NANO SOLUBLE SALT VITRIFIED TILES



Design No

8001

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

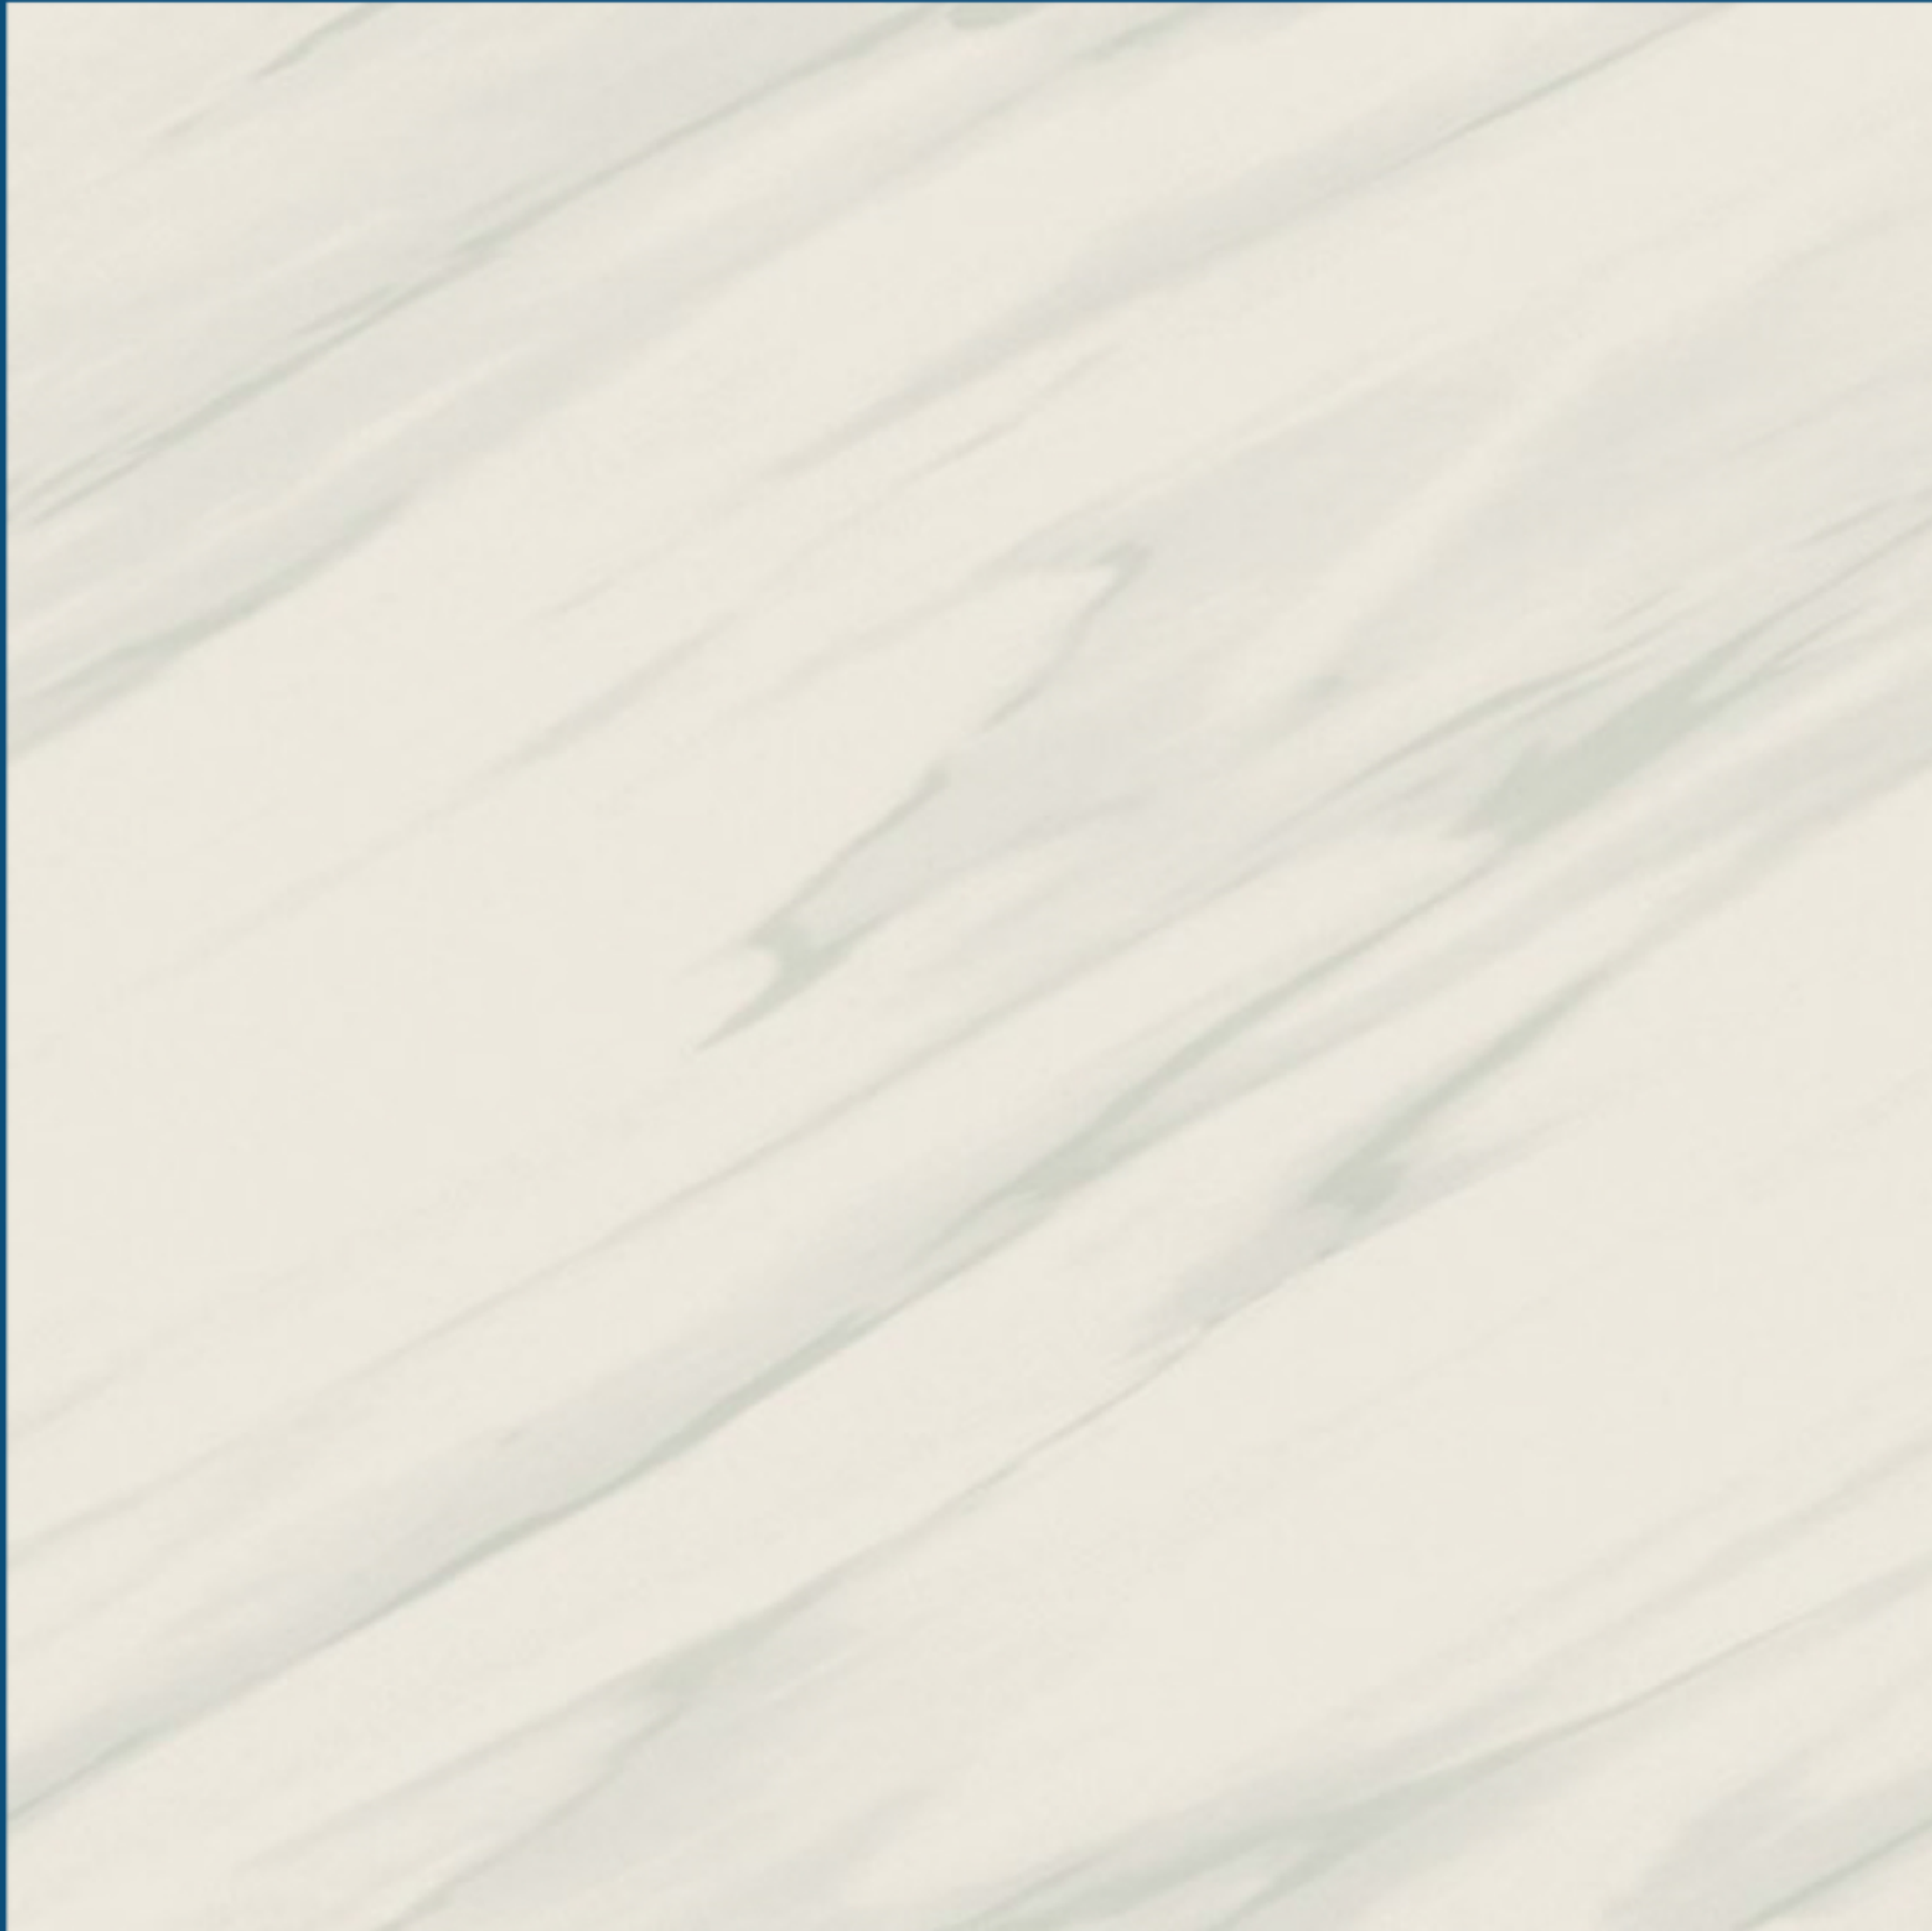

Design No

8002

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8003

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

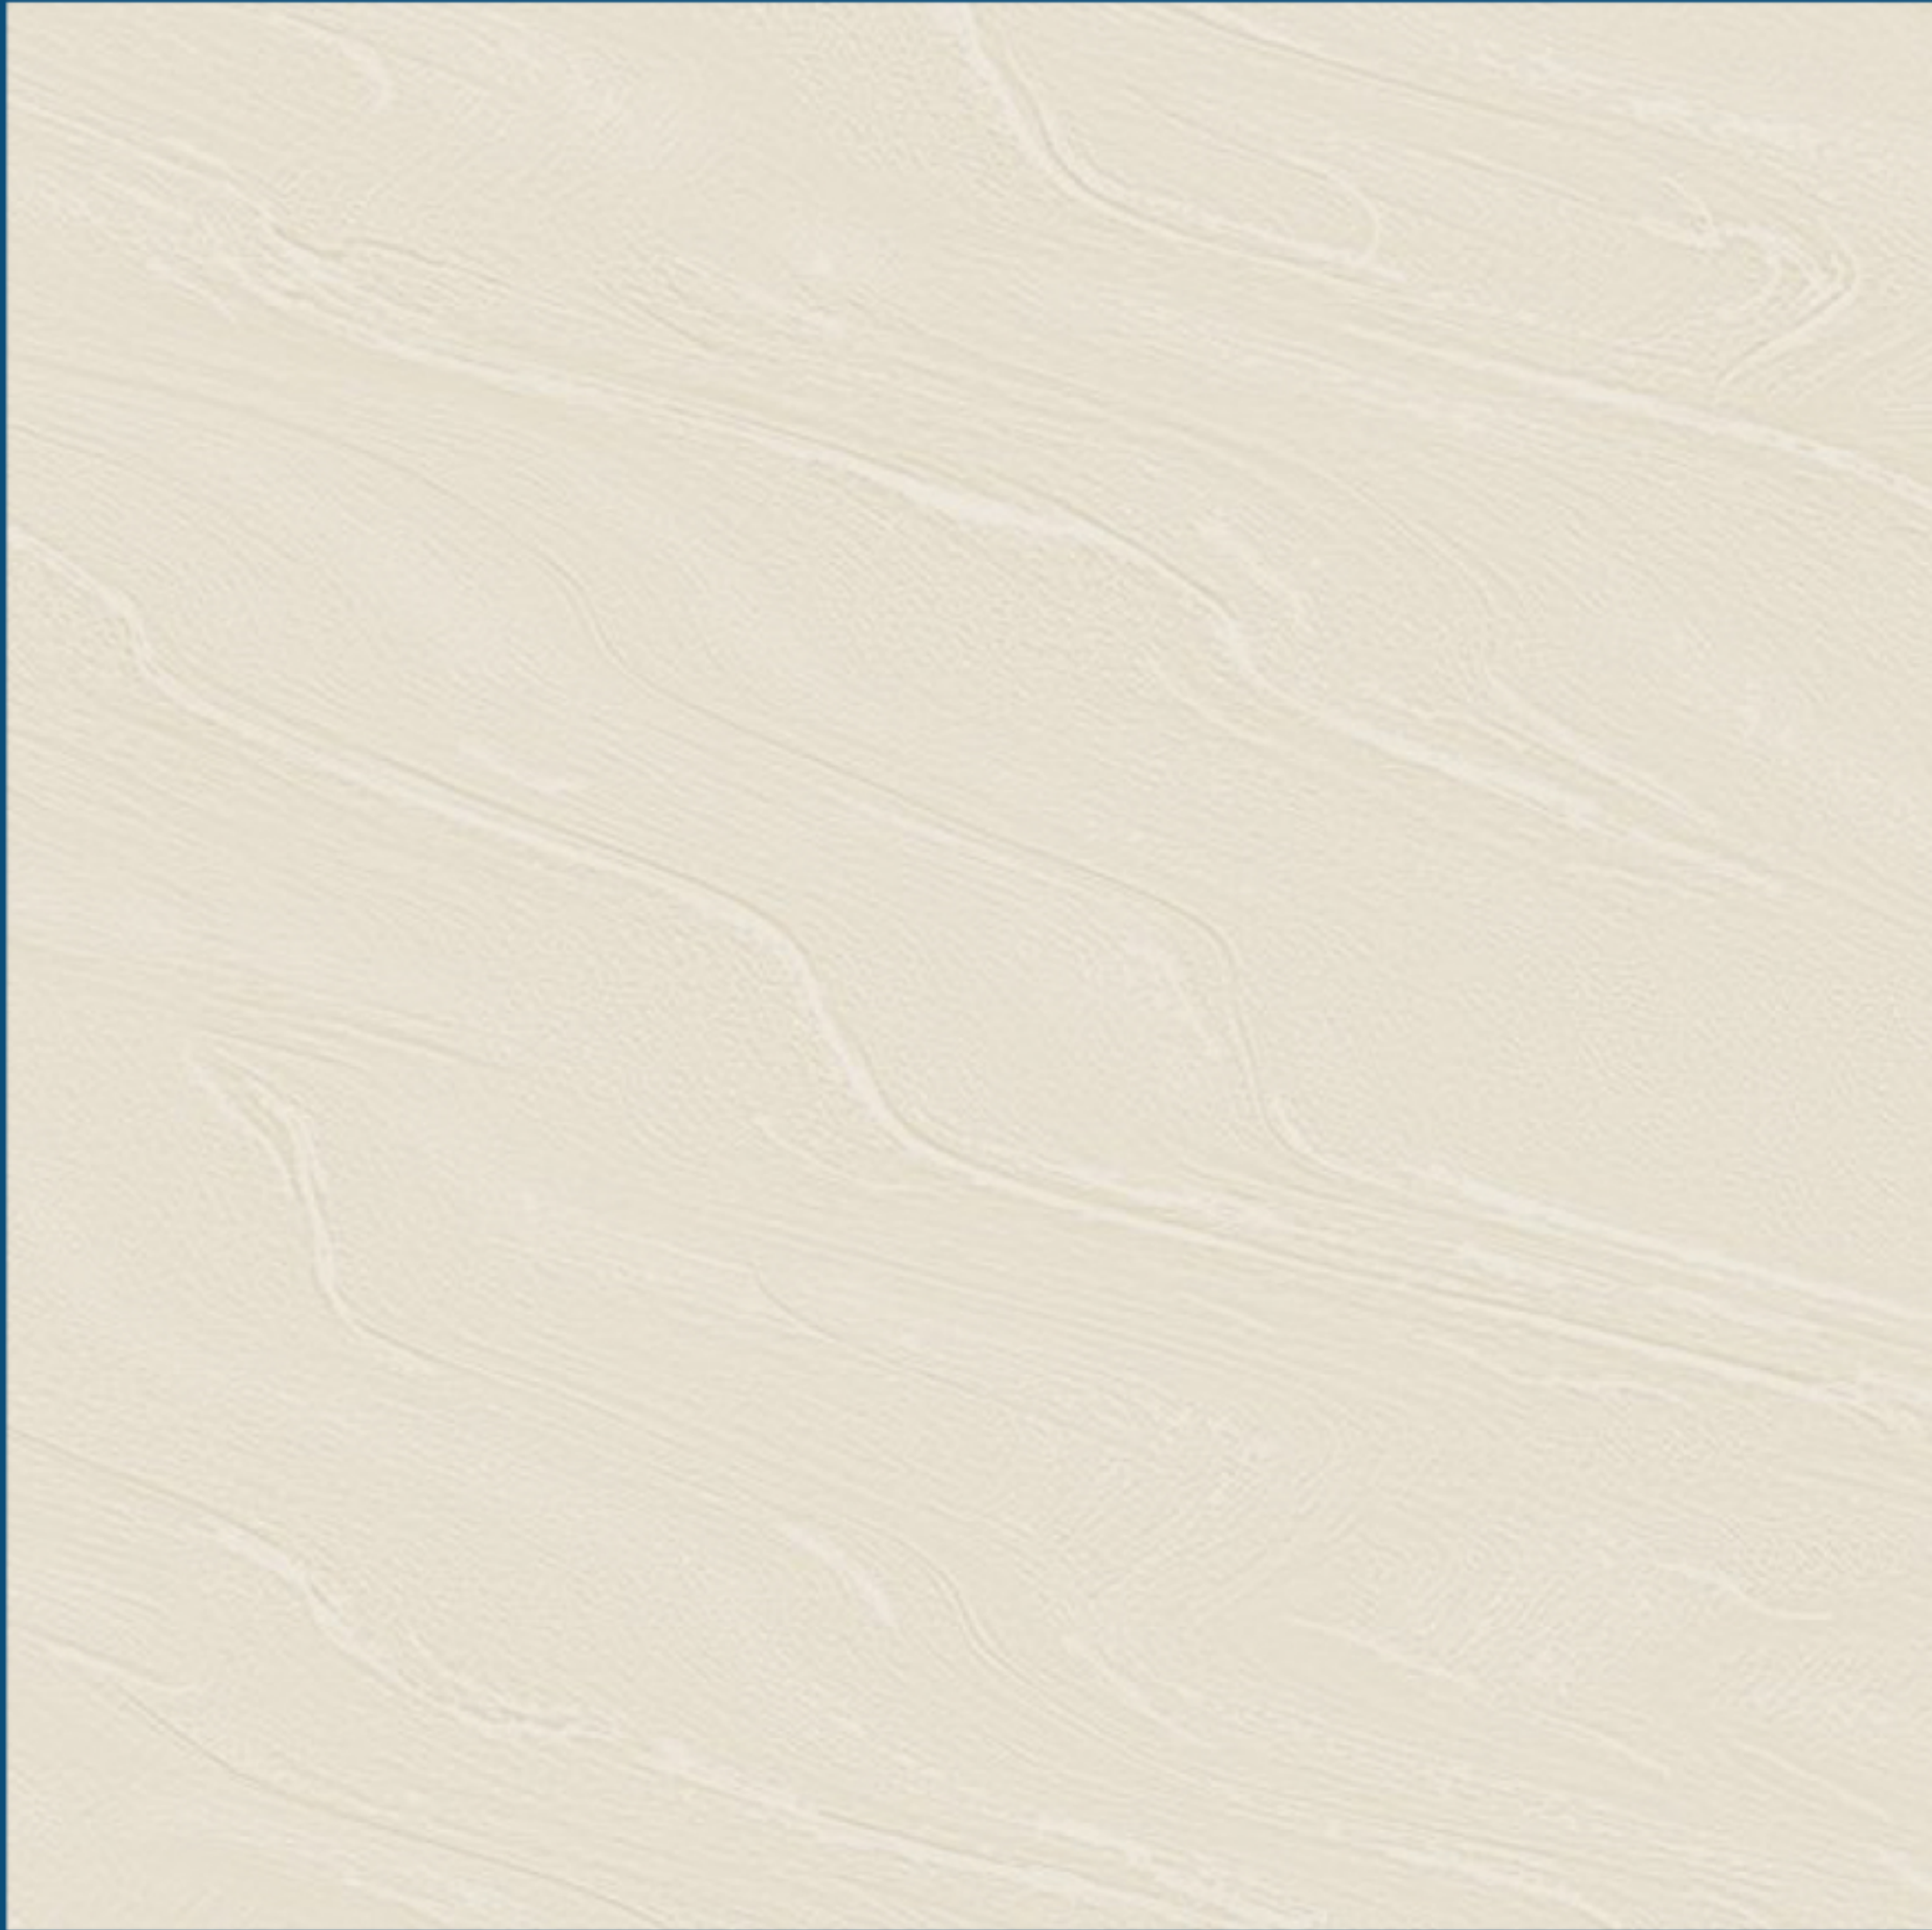

Design No

8005

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8007

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

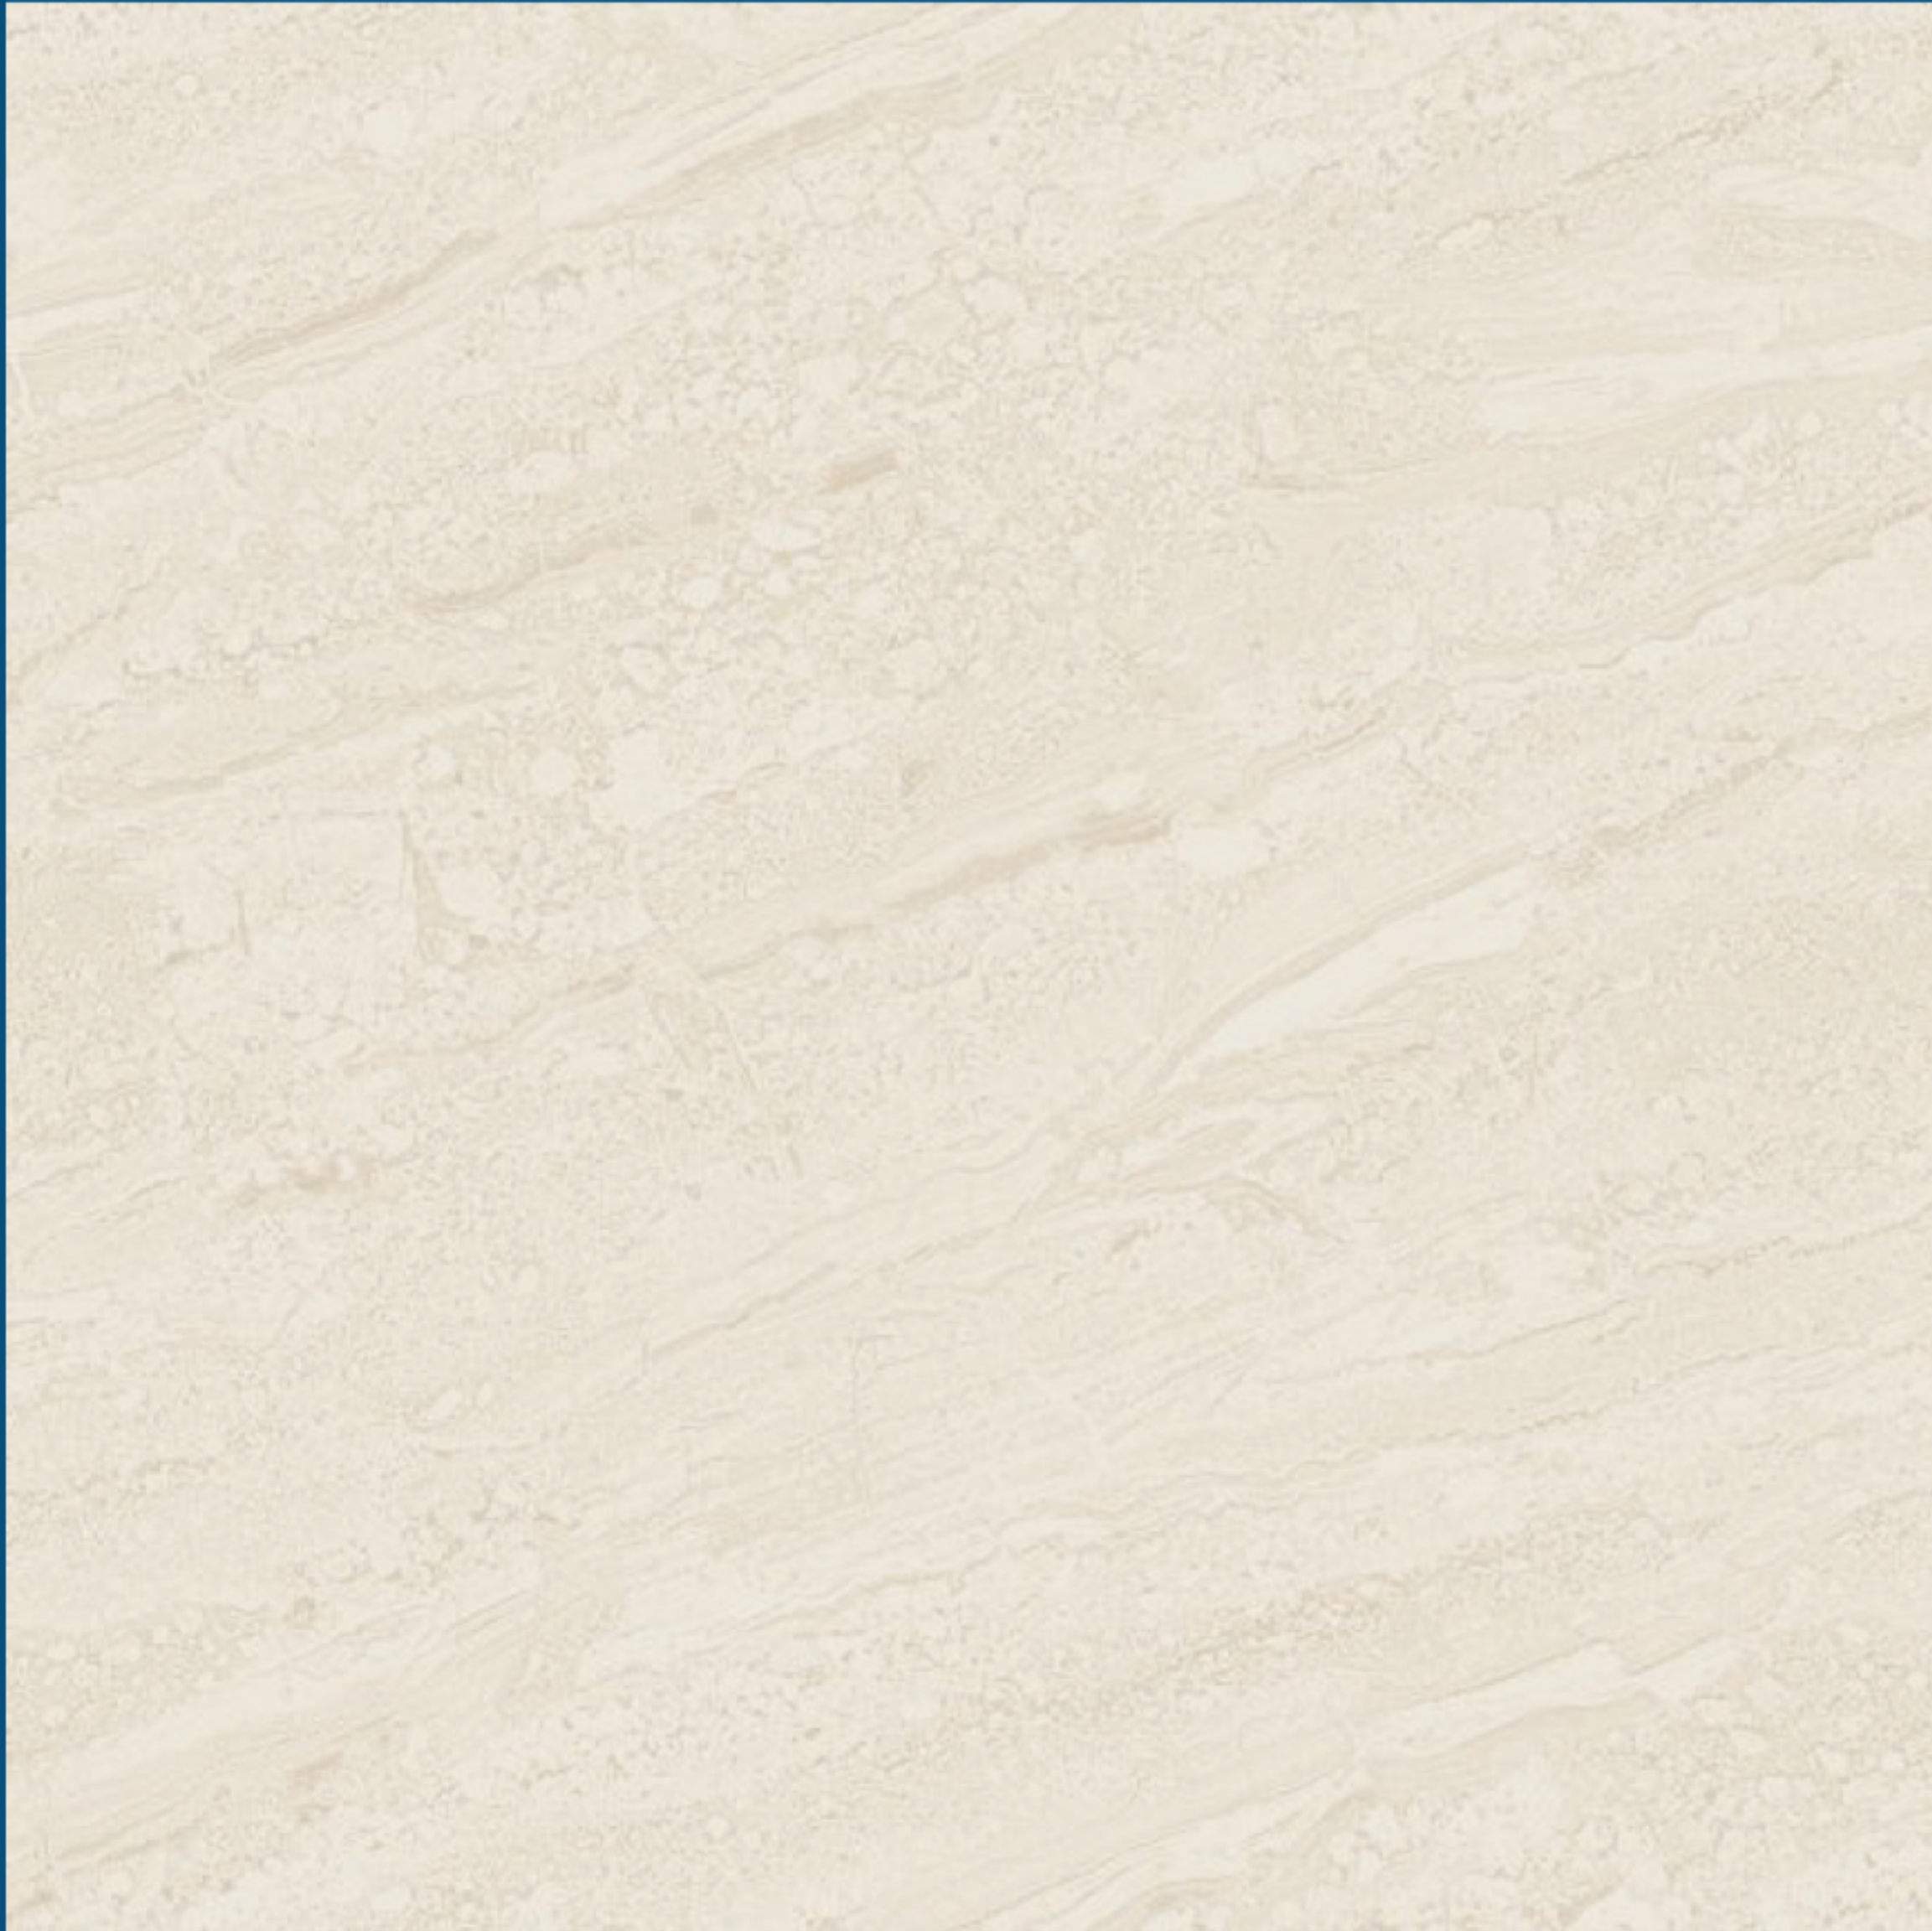

Design No

8008

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

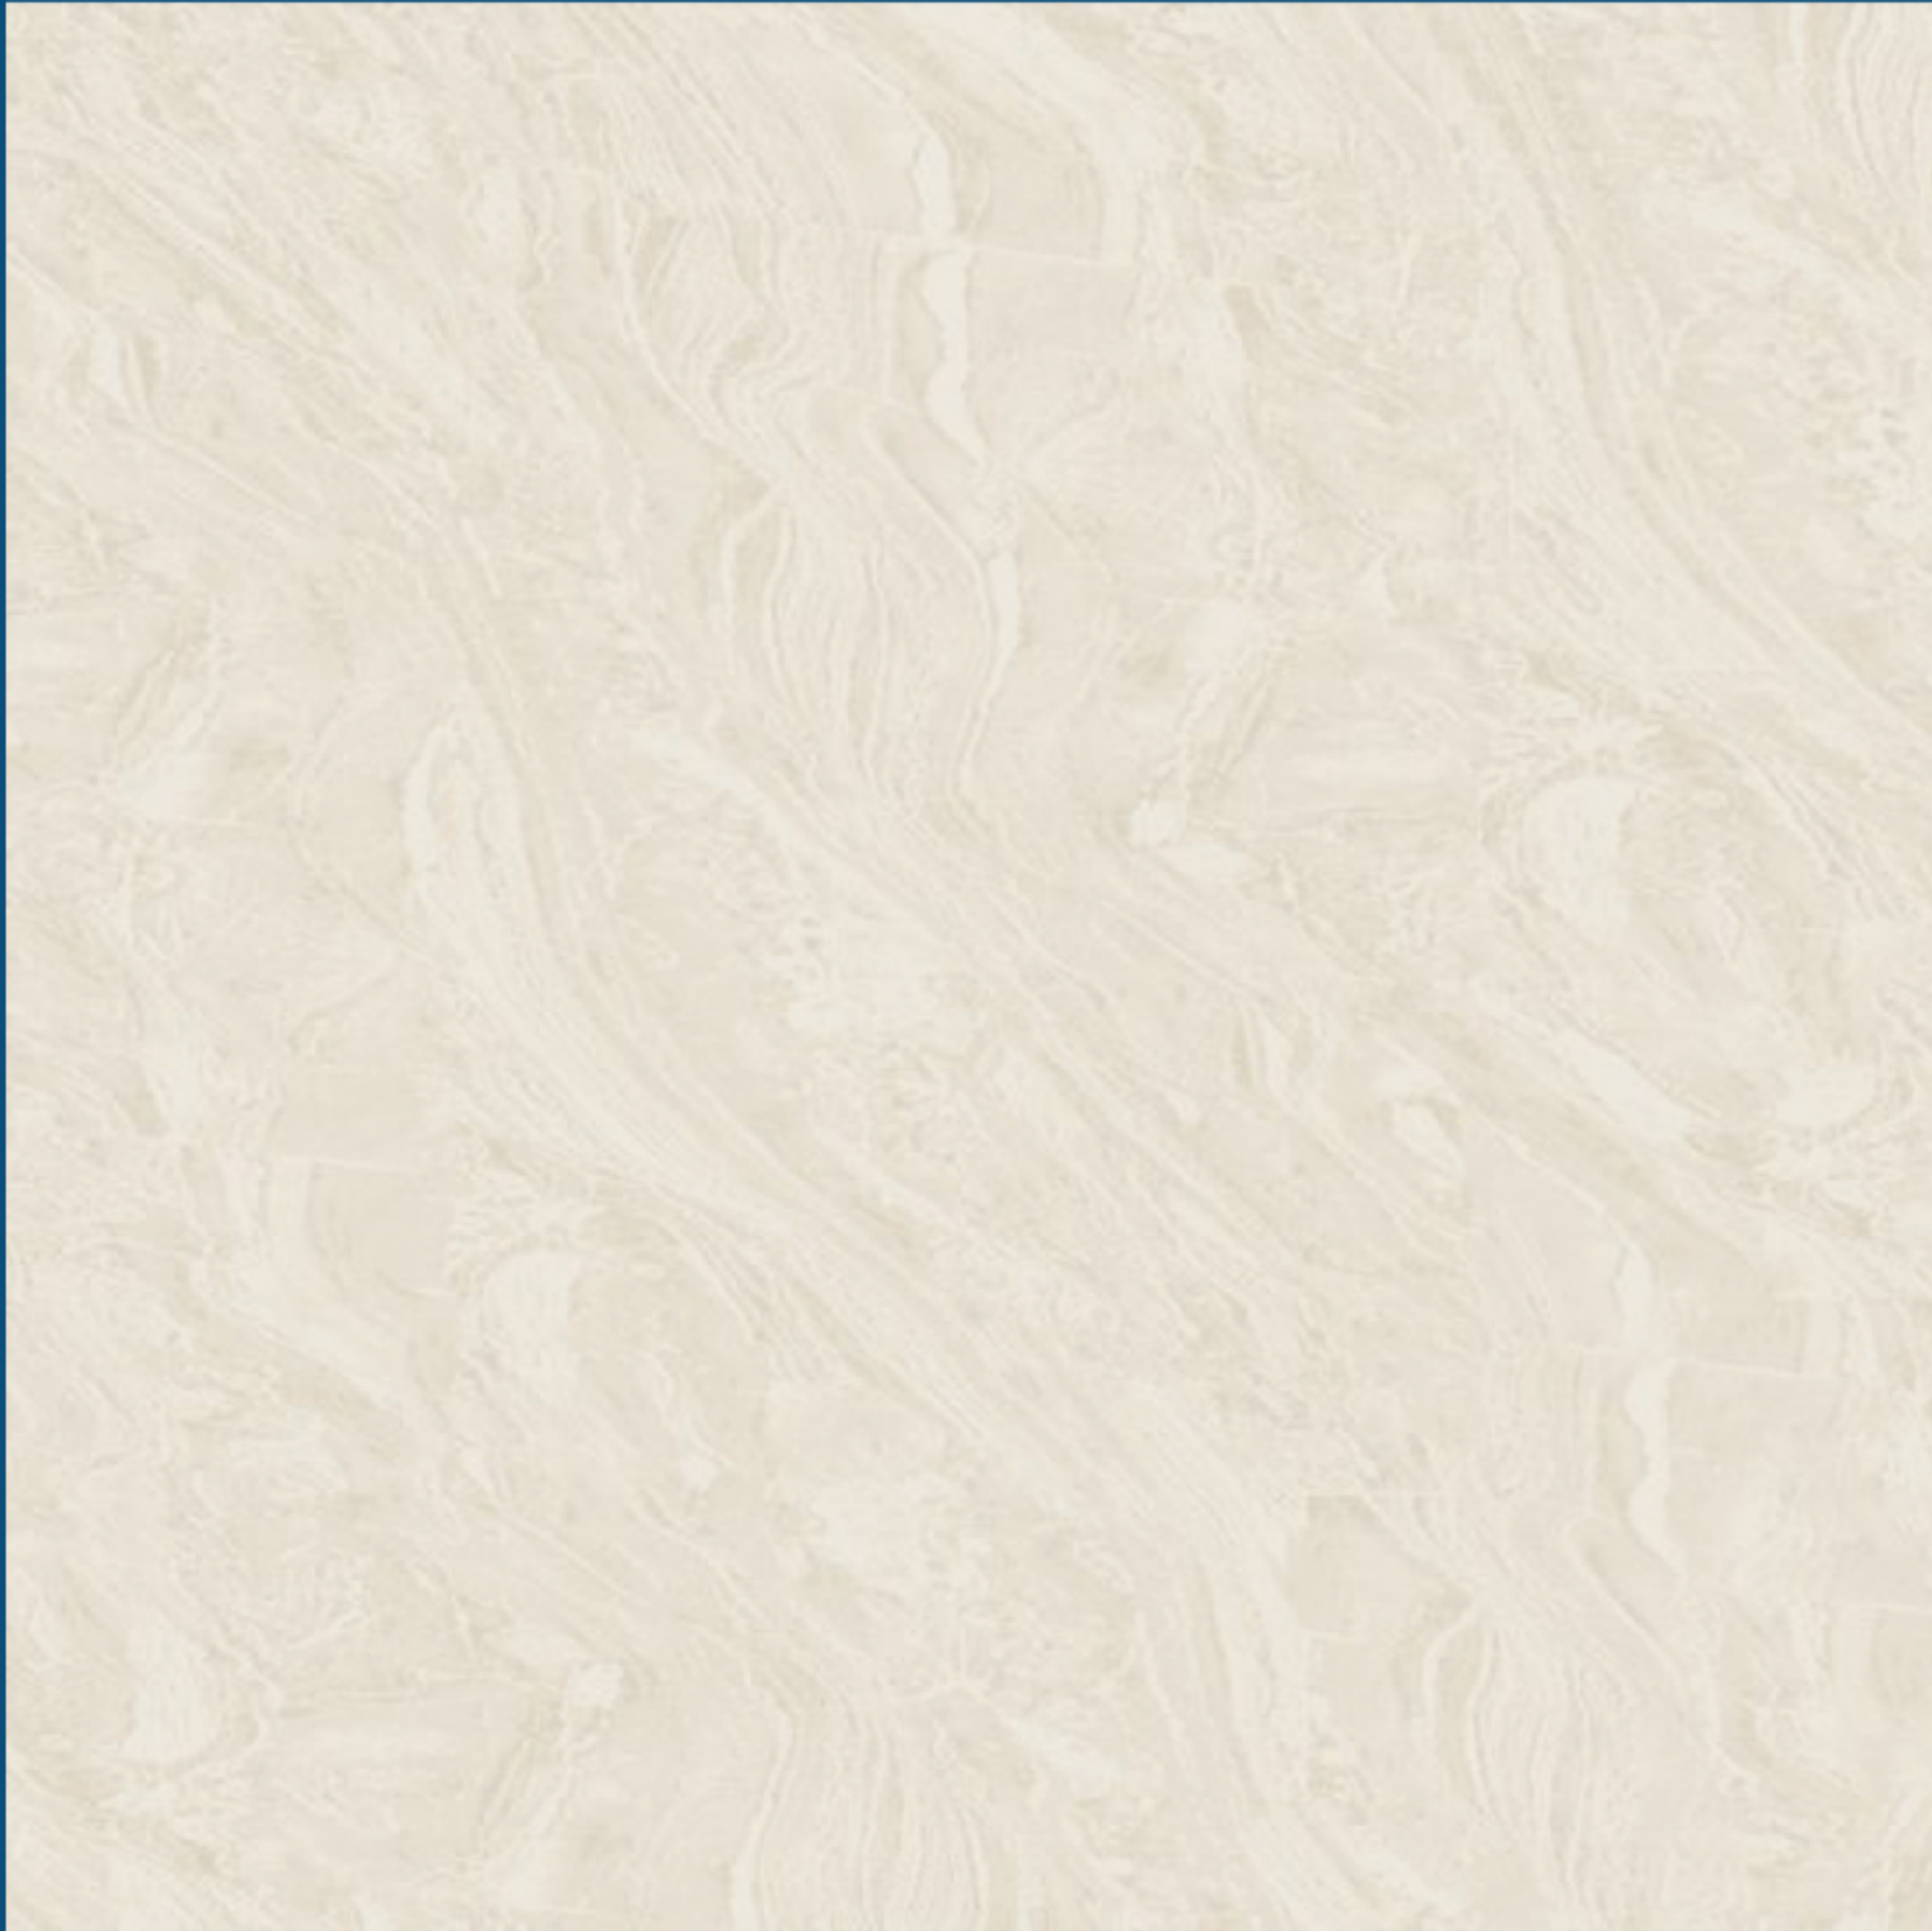

Design No

8009

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

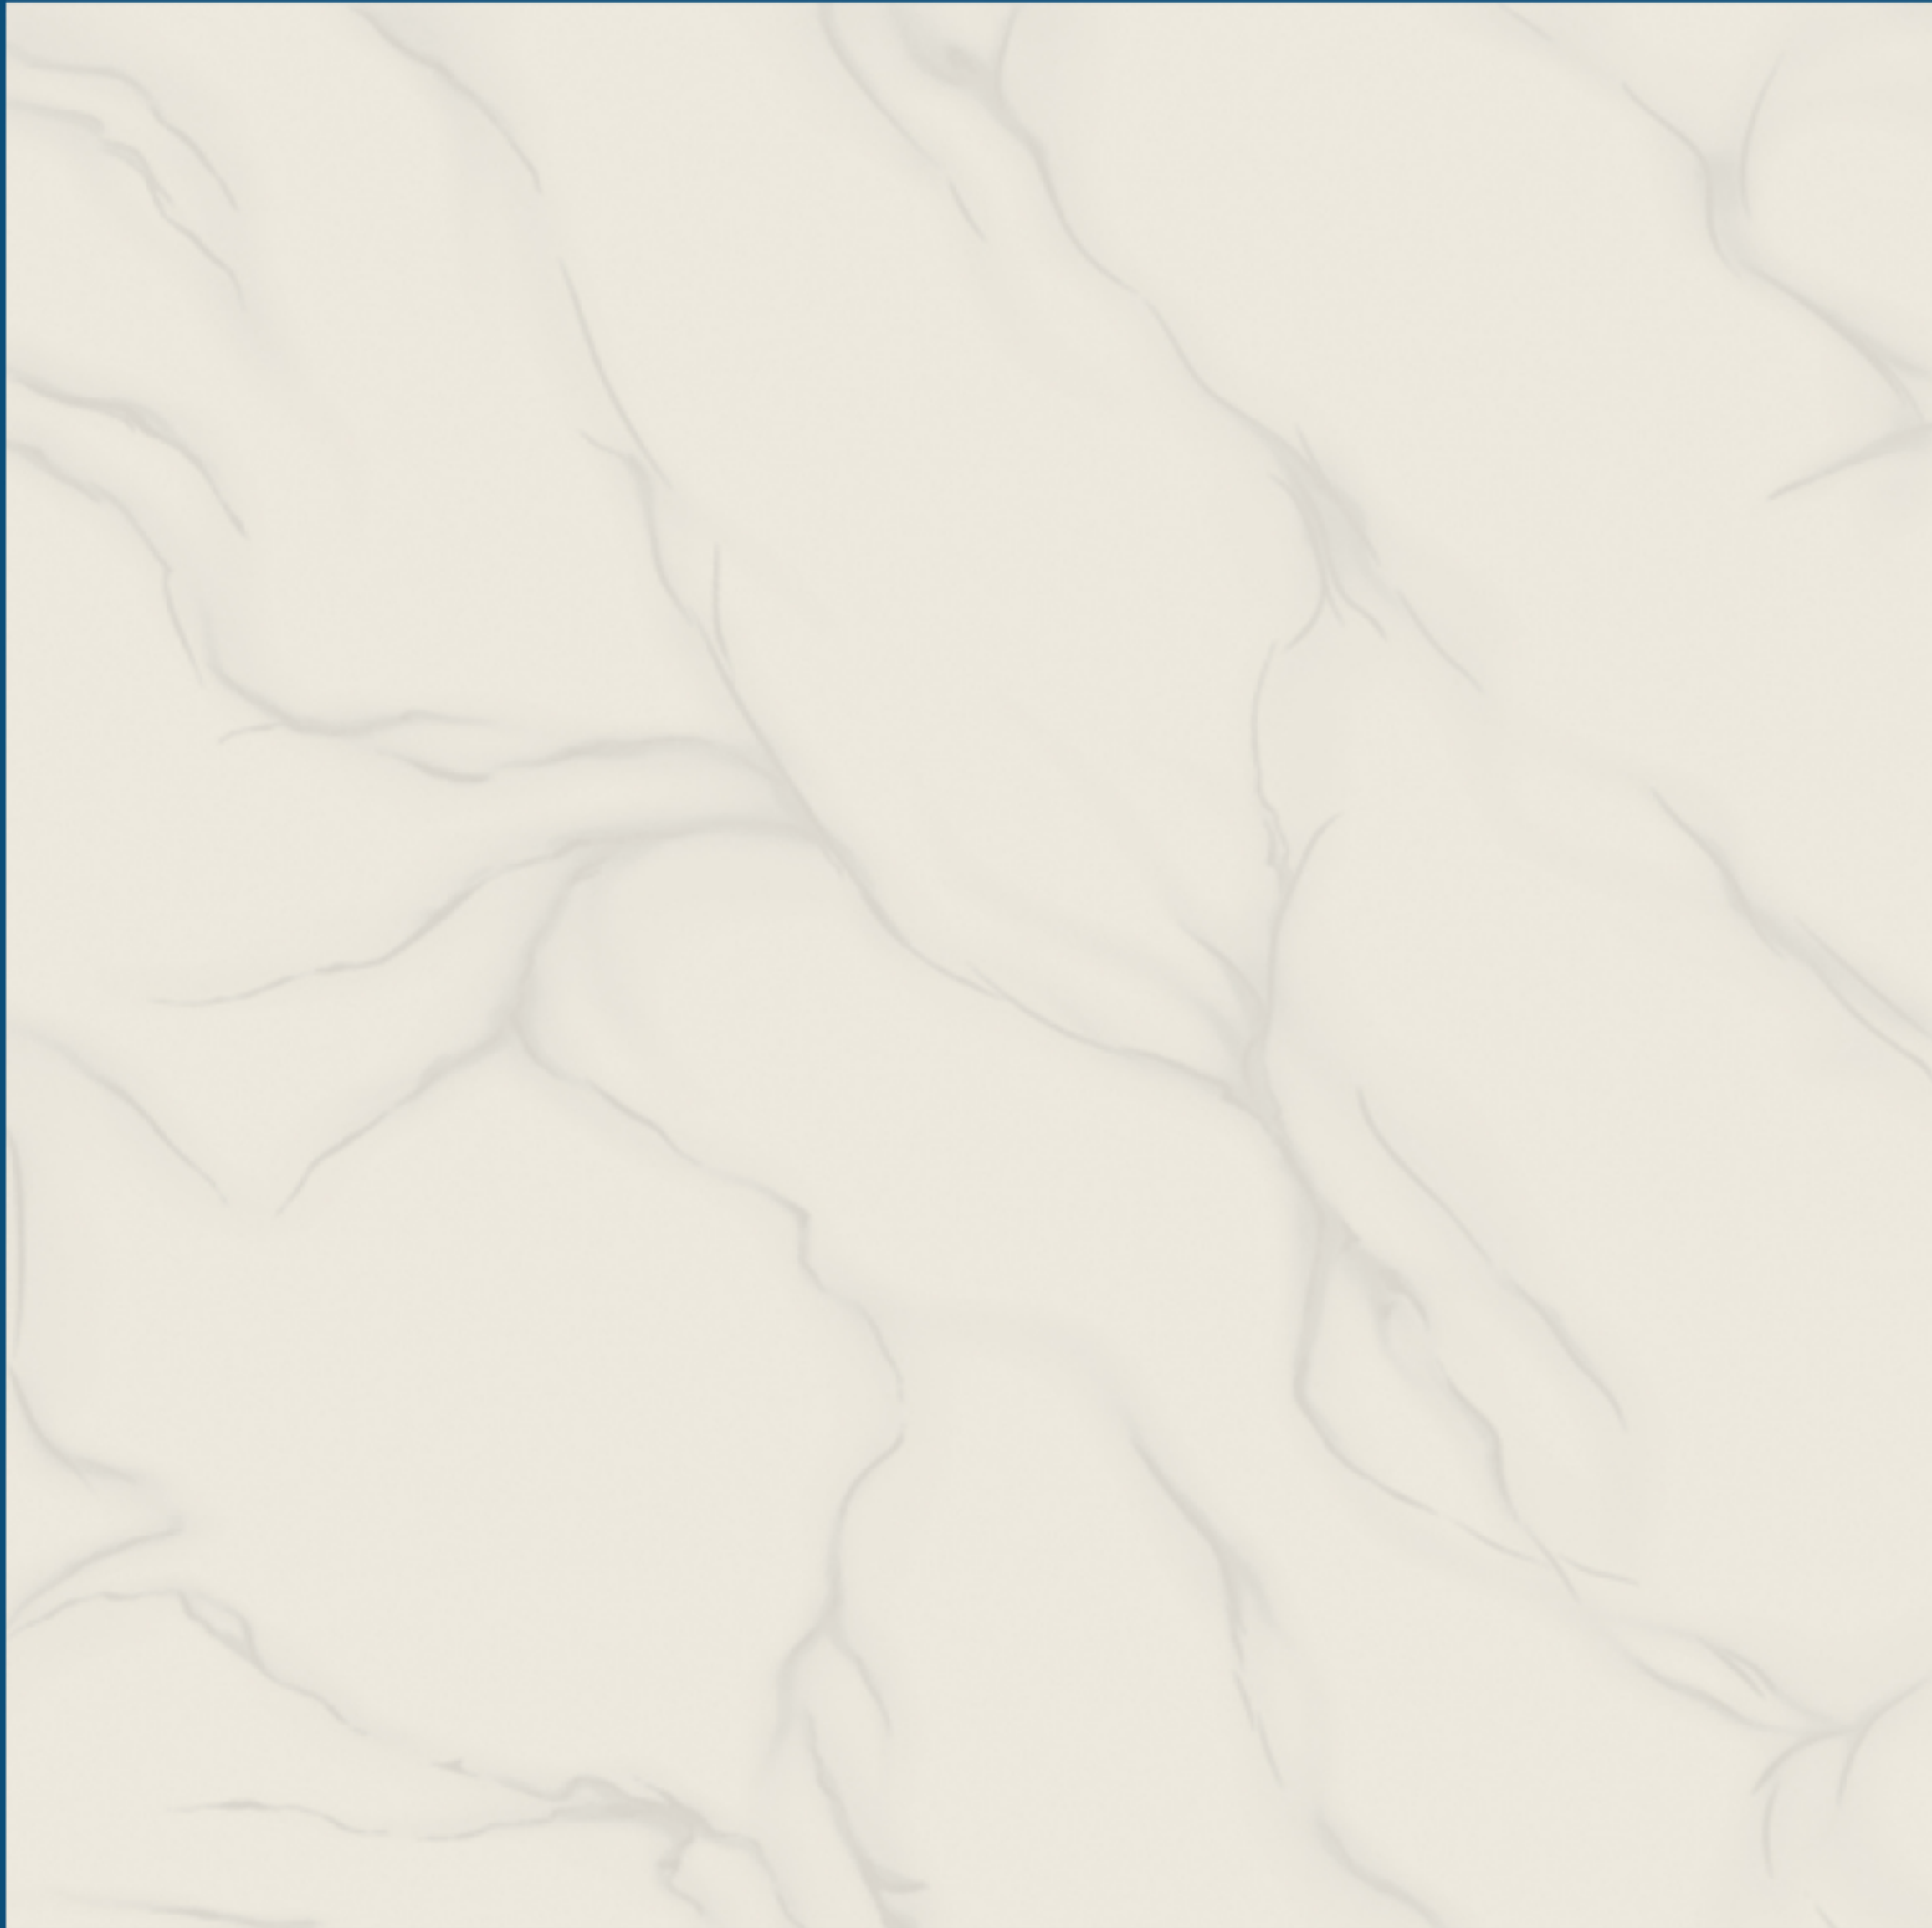

Design No

8010

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8012

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8013

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8014

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8016

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8018

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8019

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

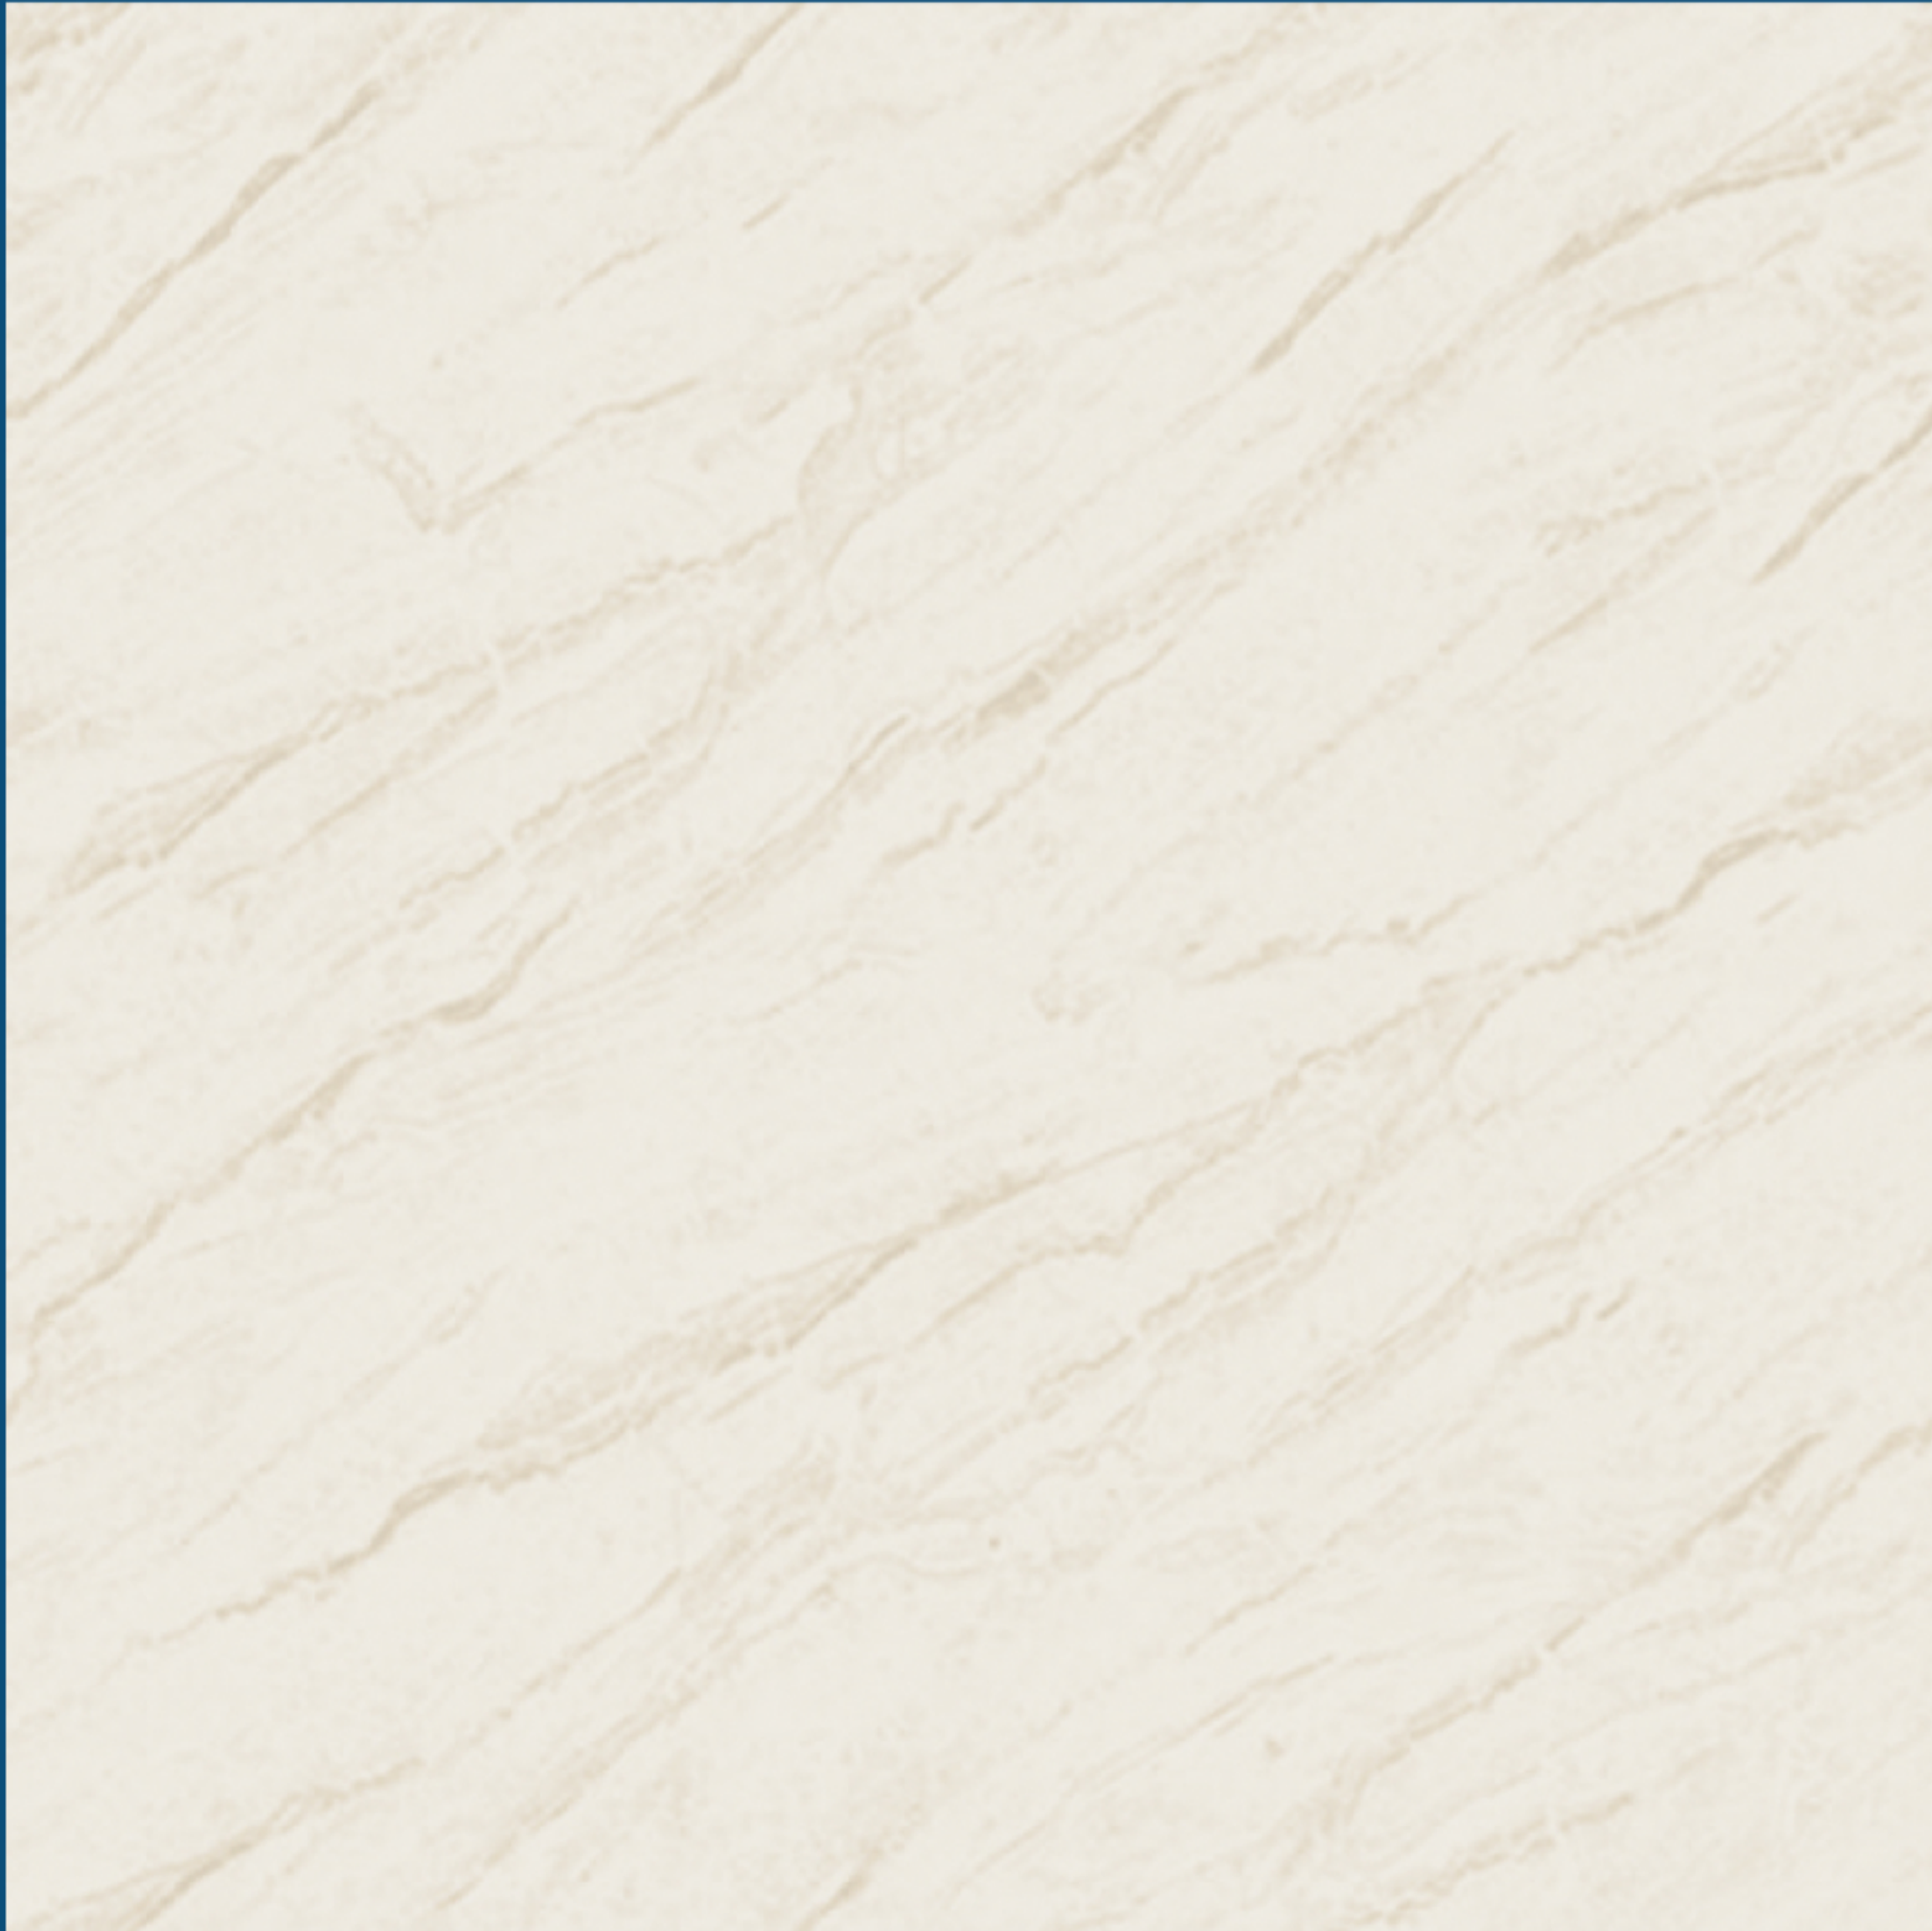

Design No

8029

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

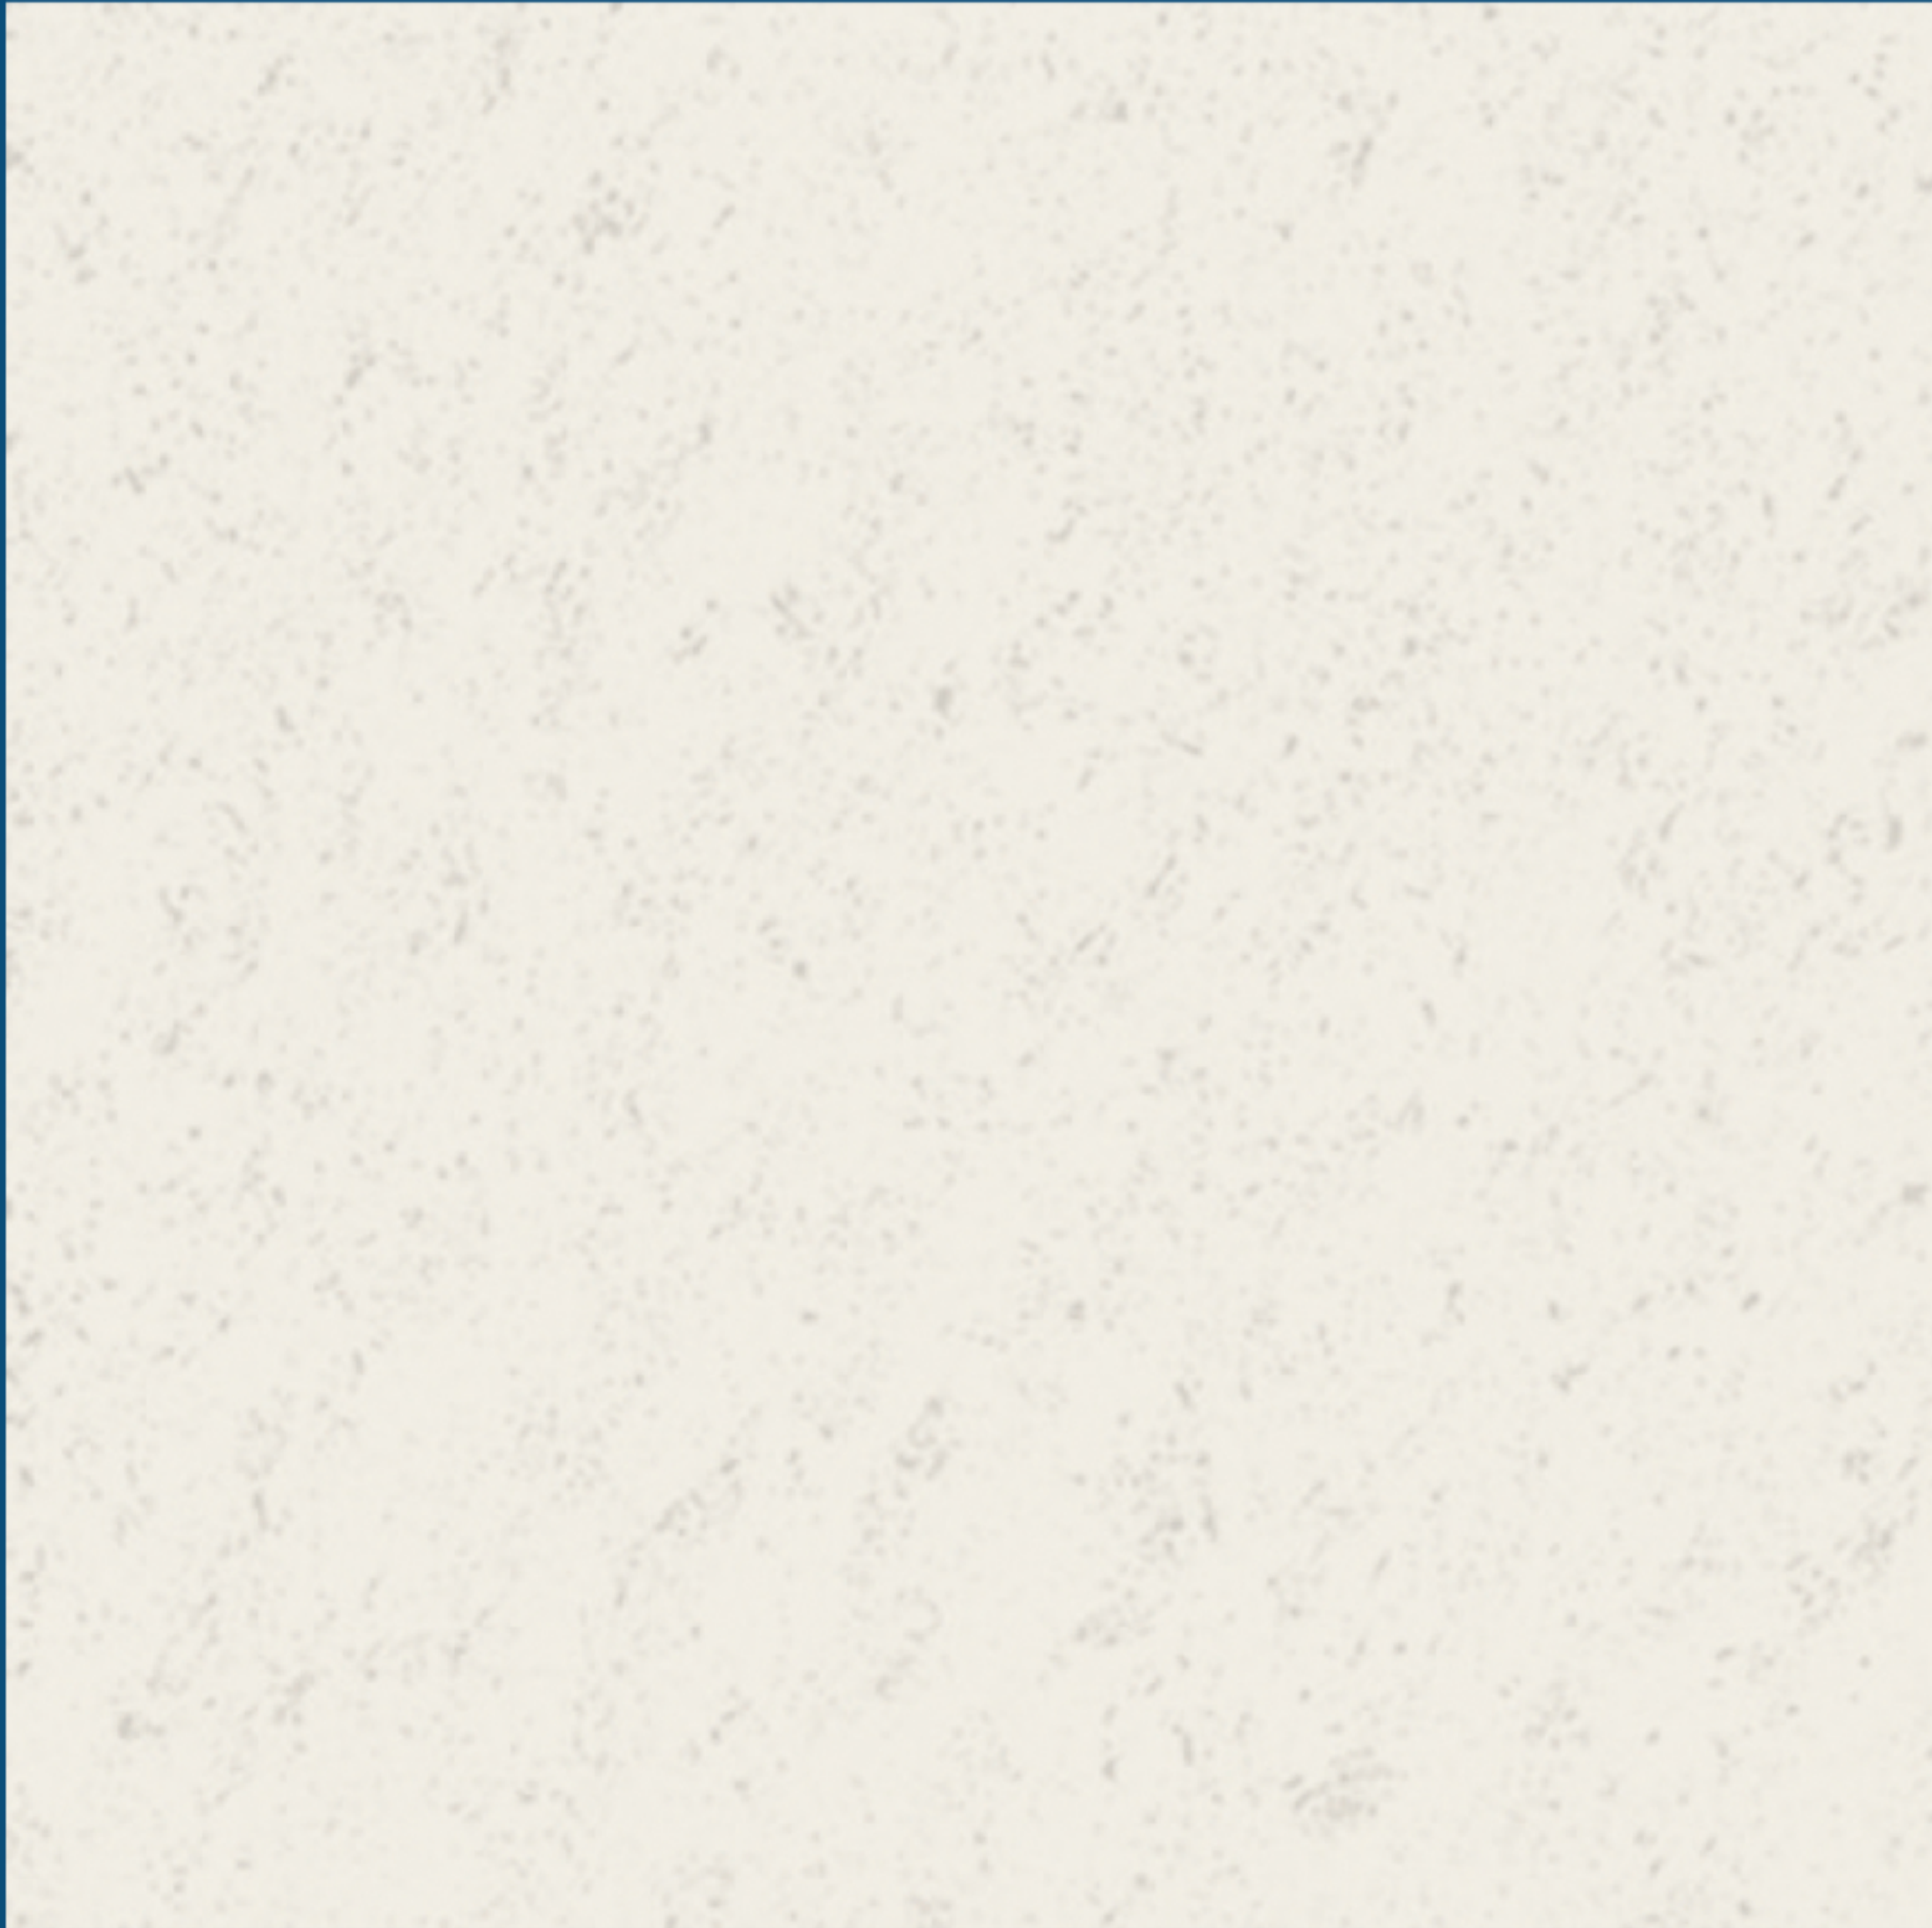

Design No

8034

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

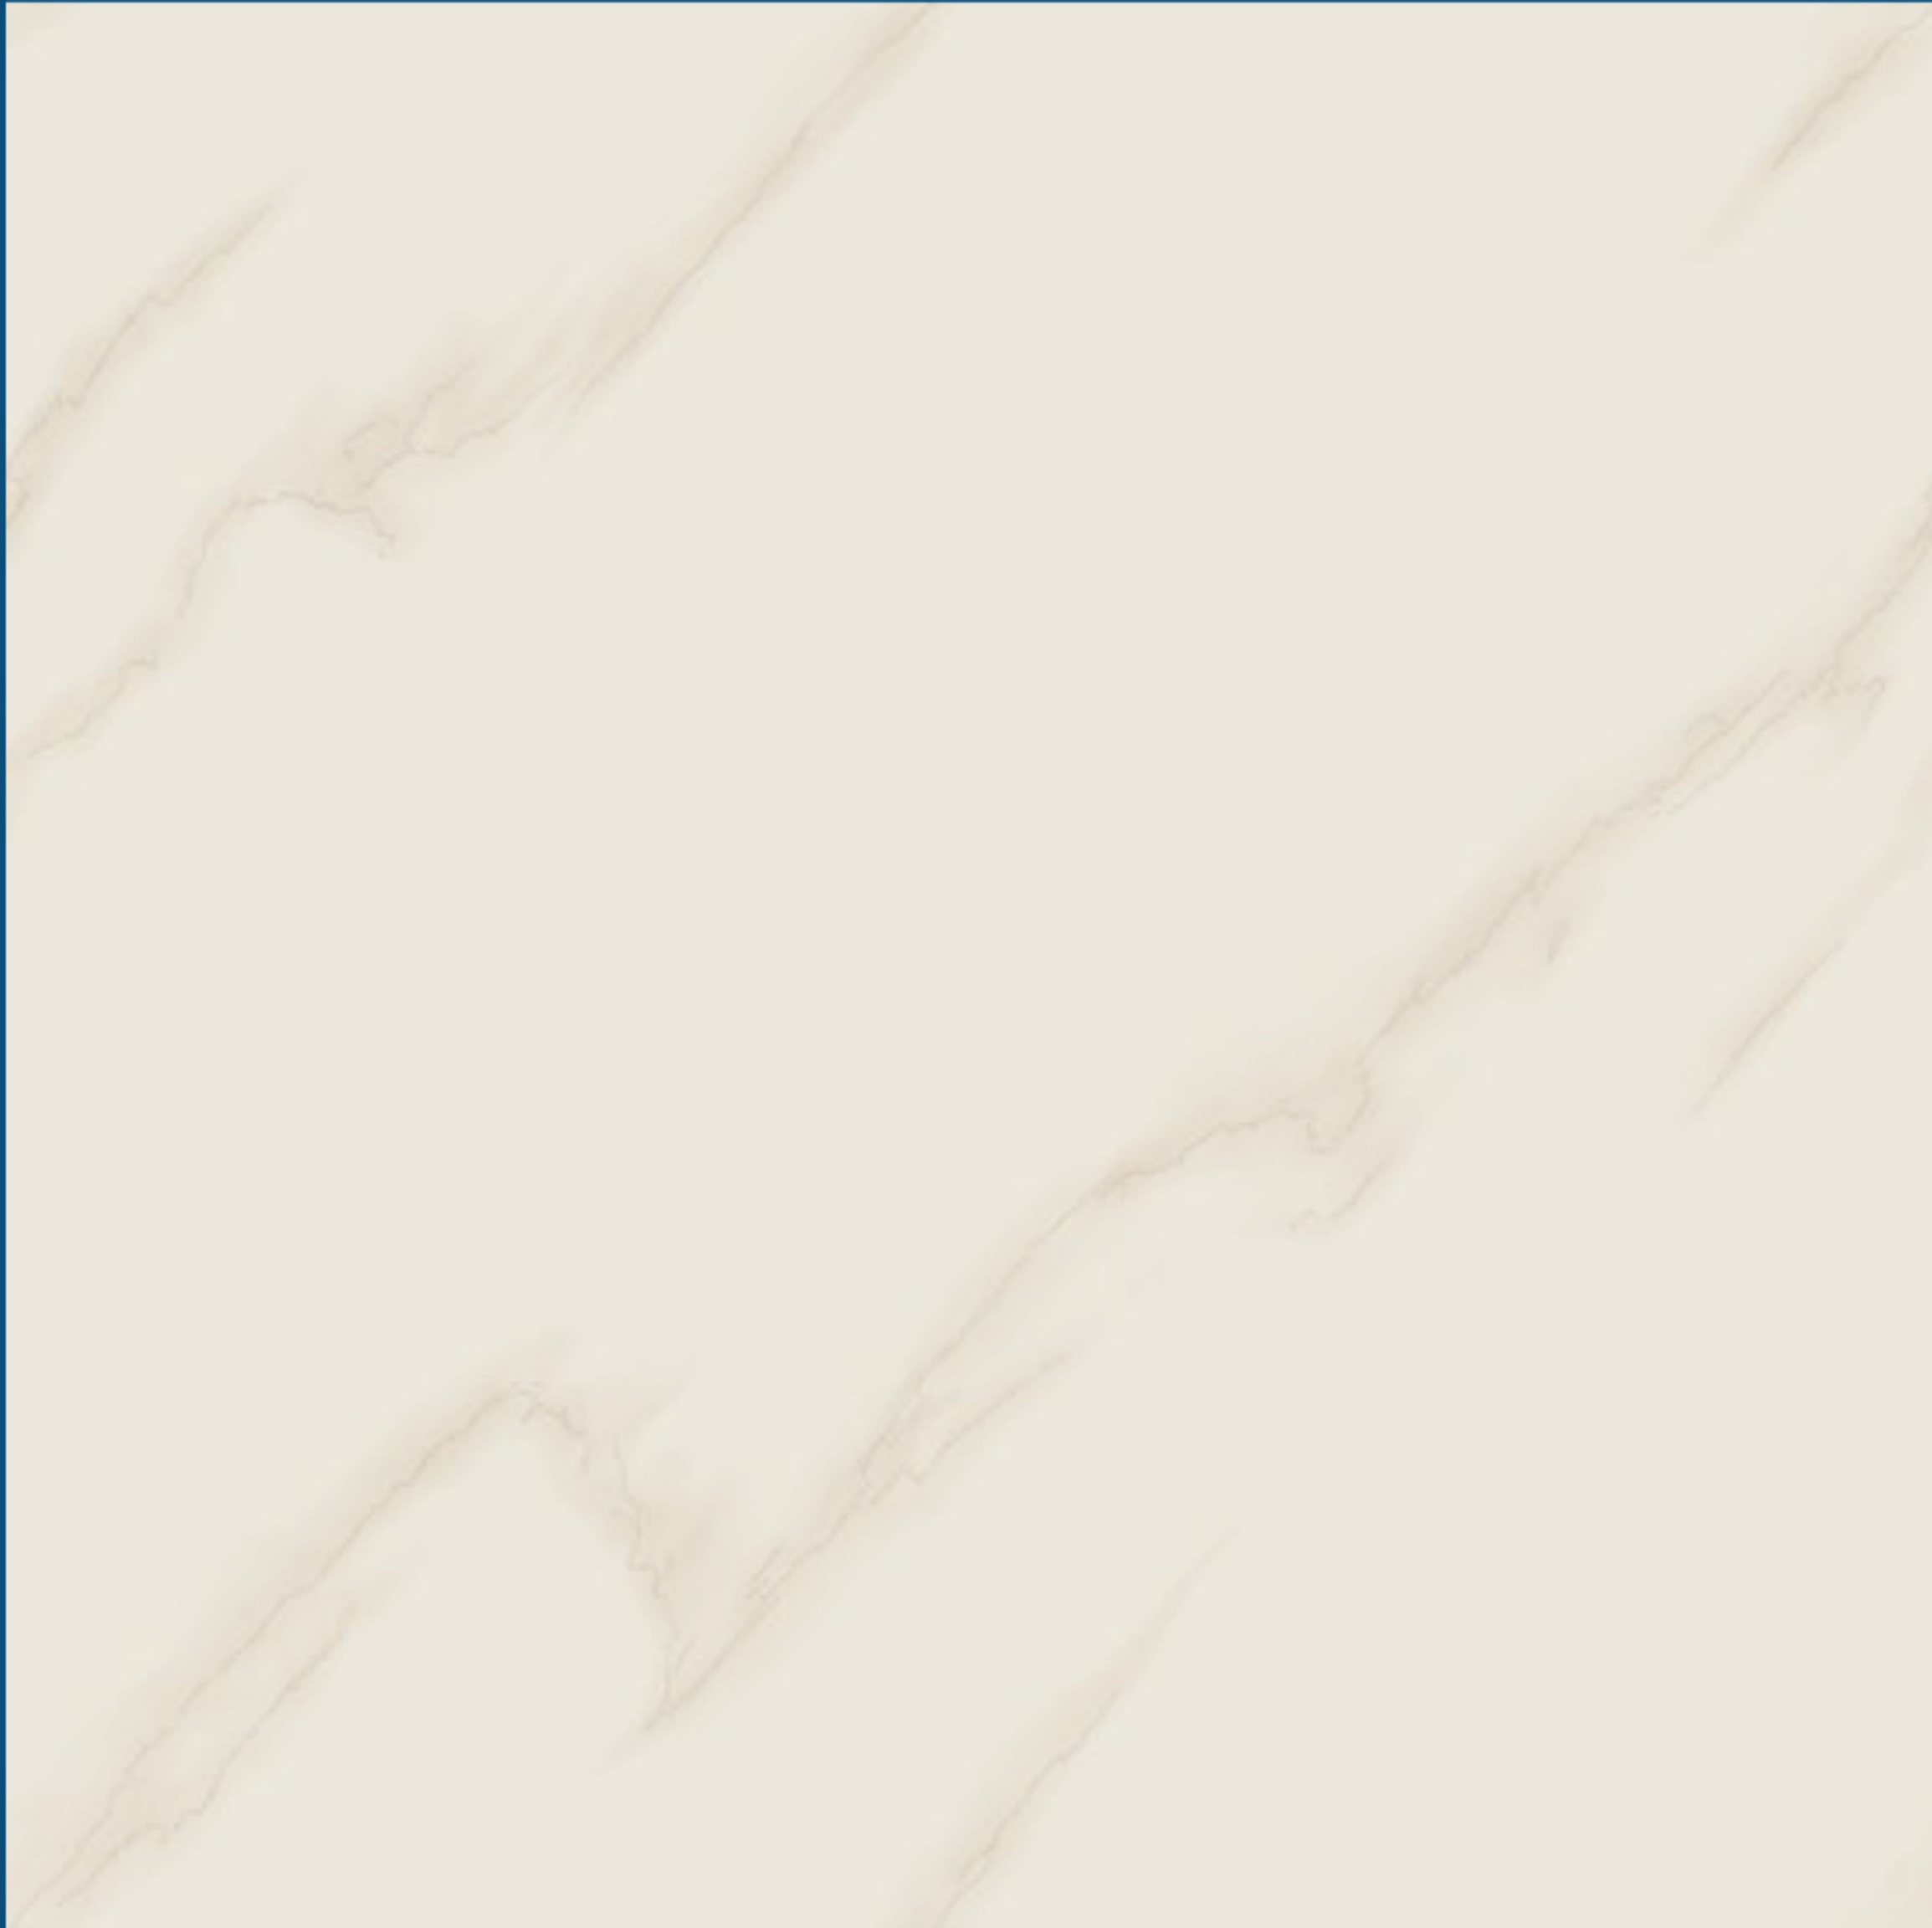

Design No

8037

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

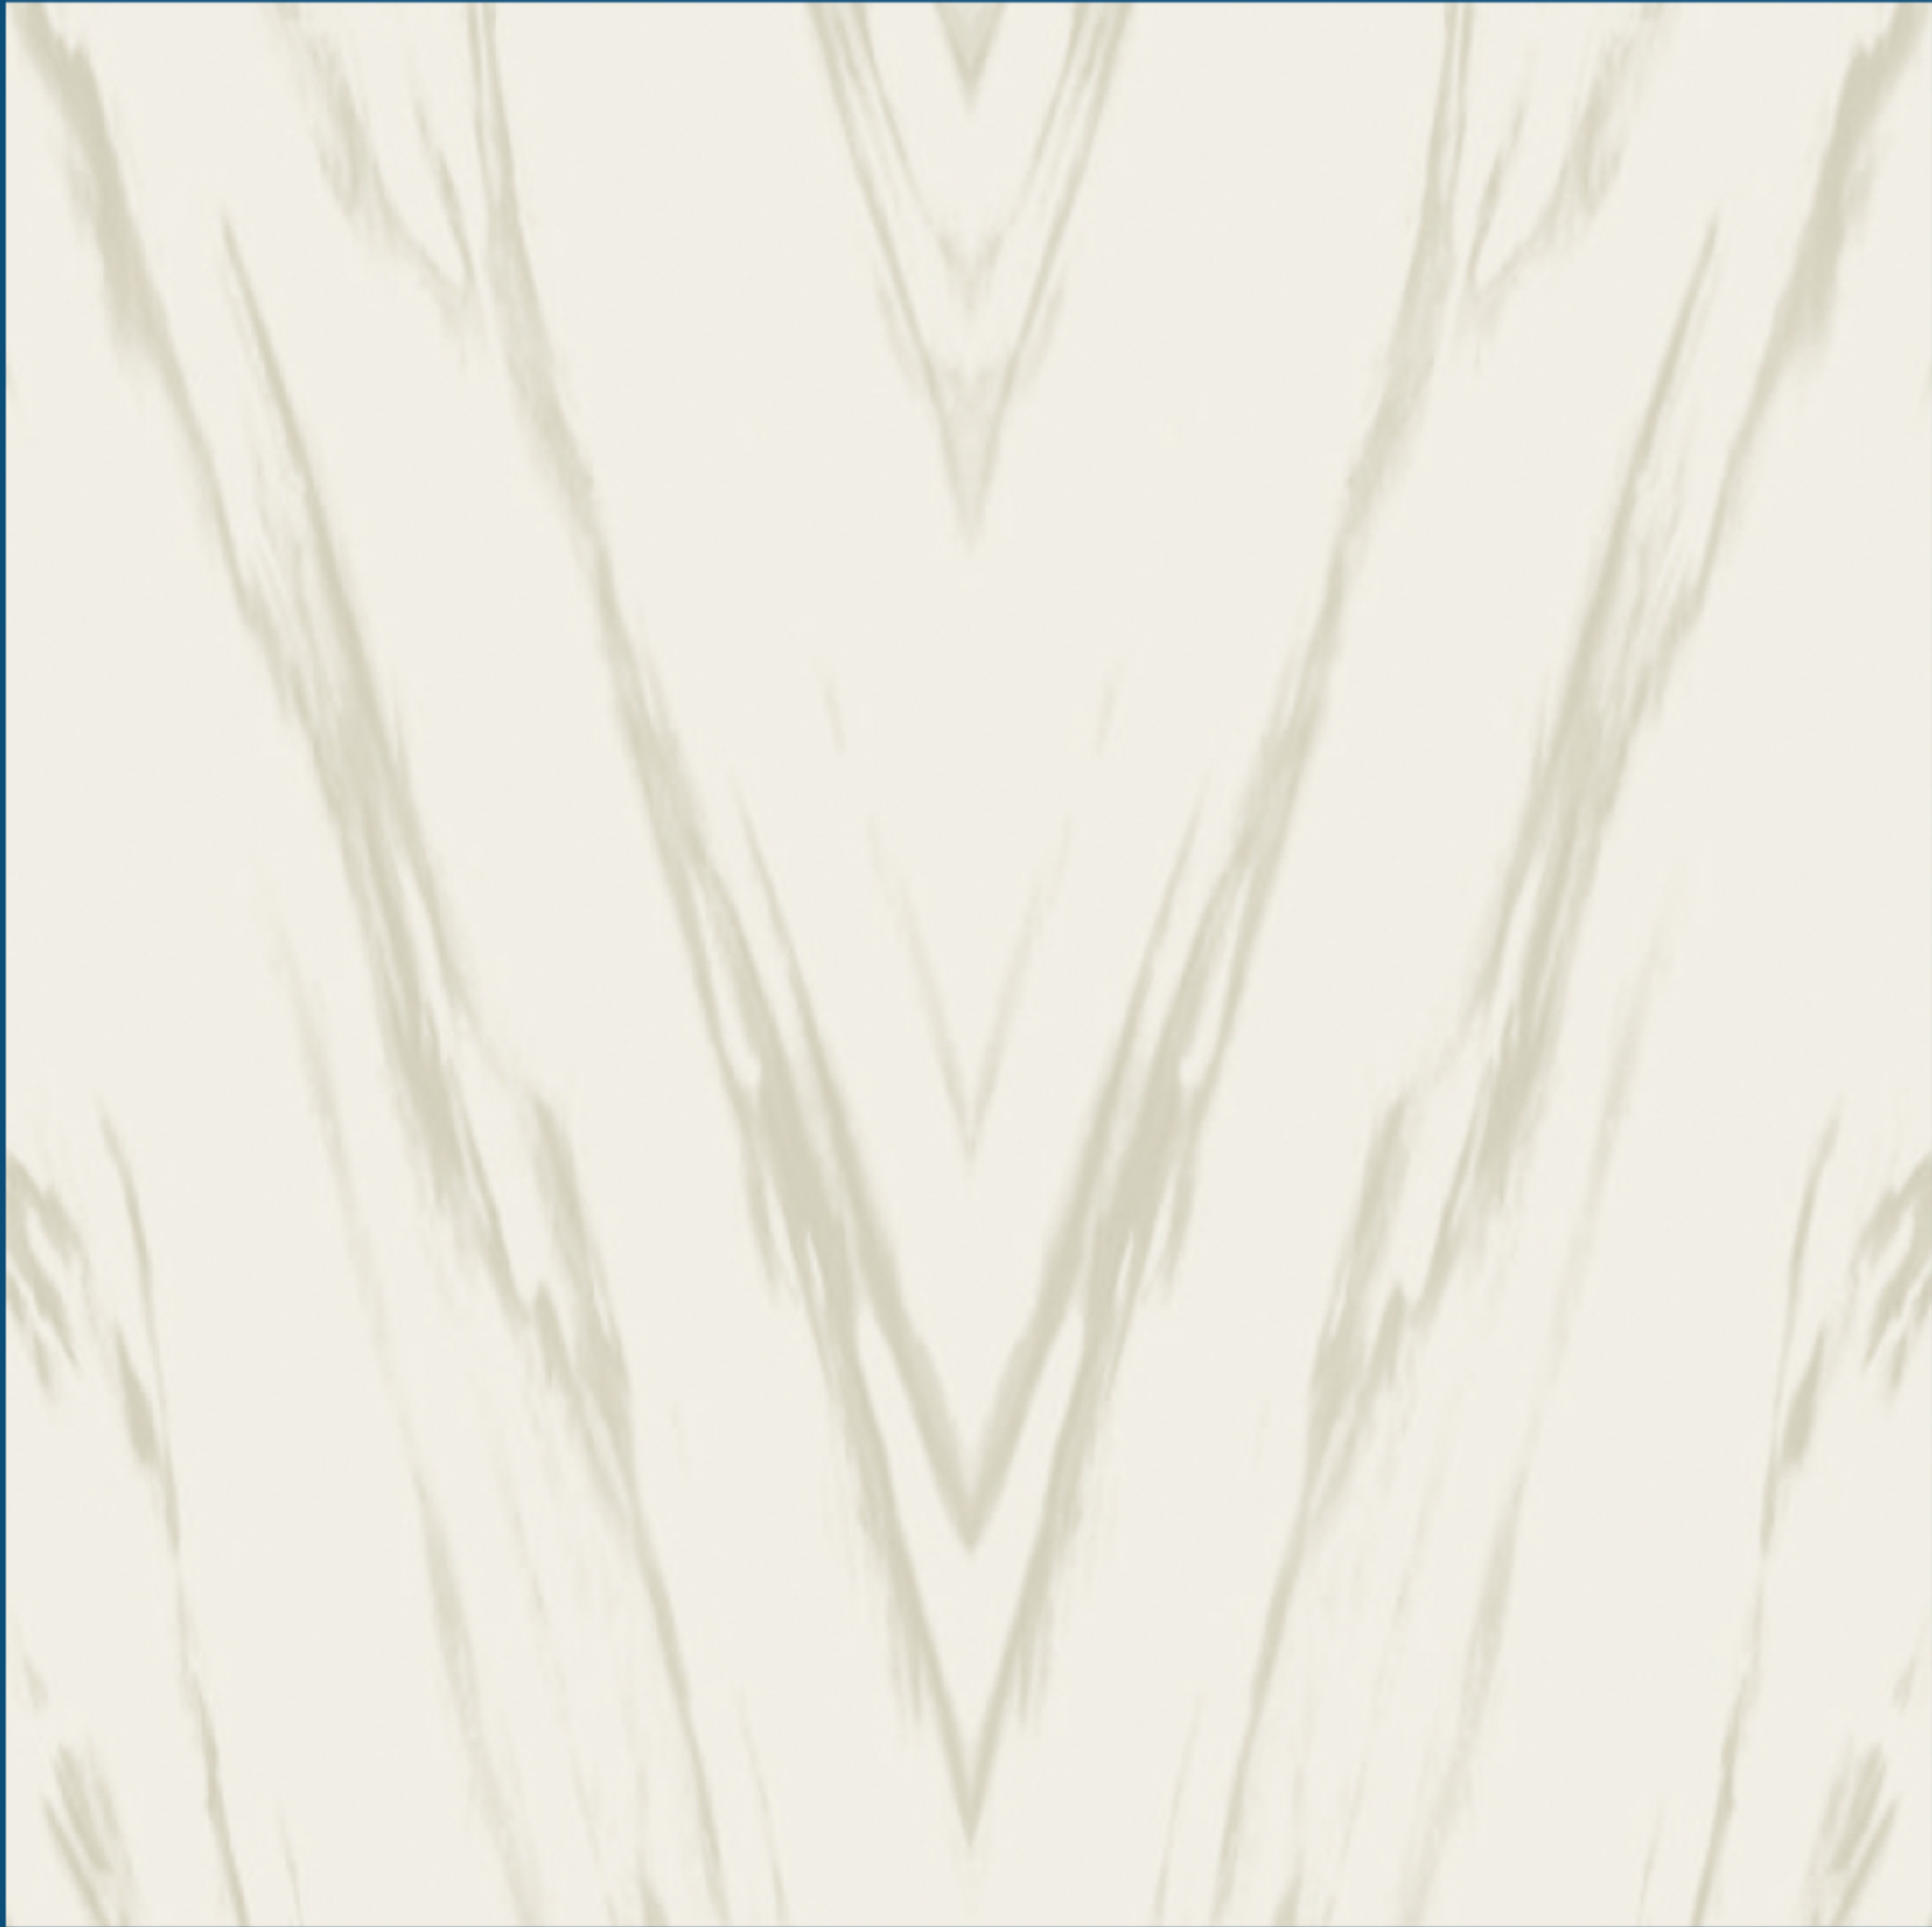

Design No

8046

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8047

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8053

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use



Design No

8054

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile




Water
Resistance



Stain
Resistance



Indoor Use

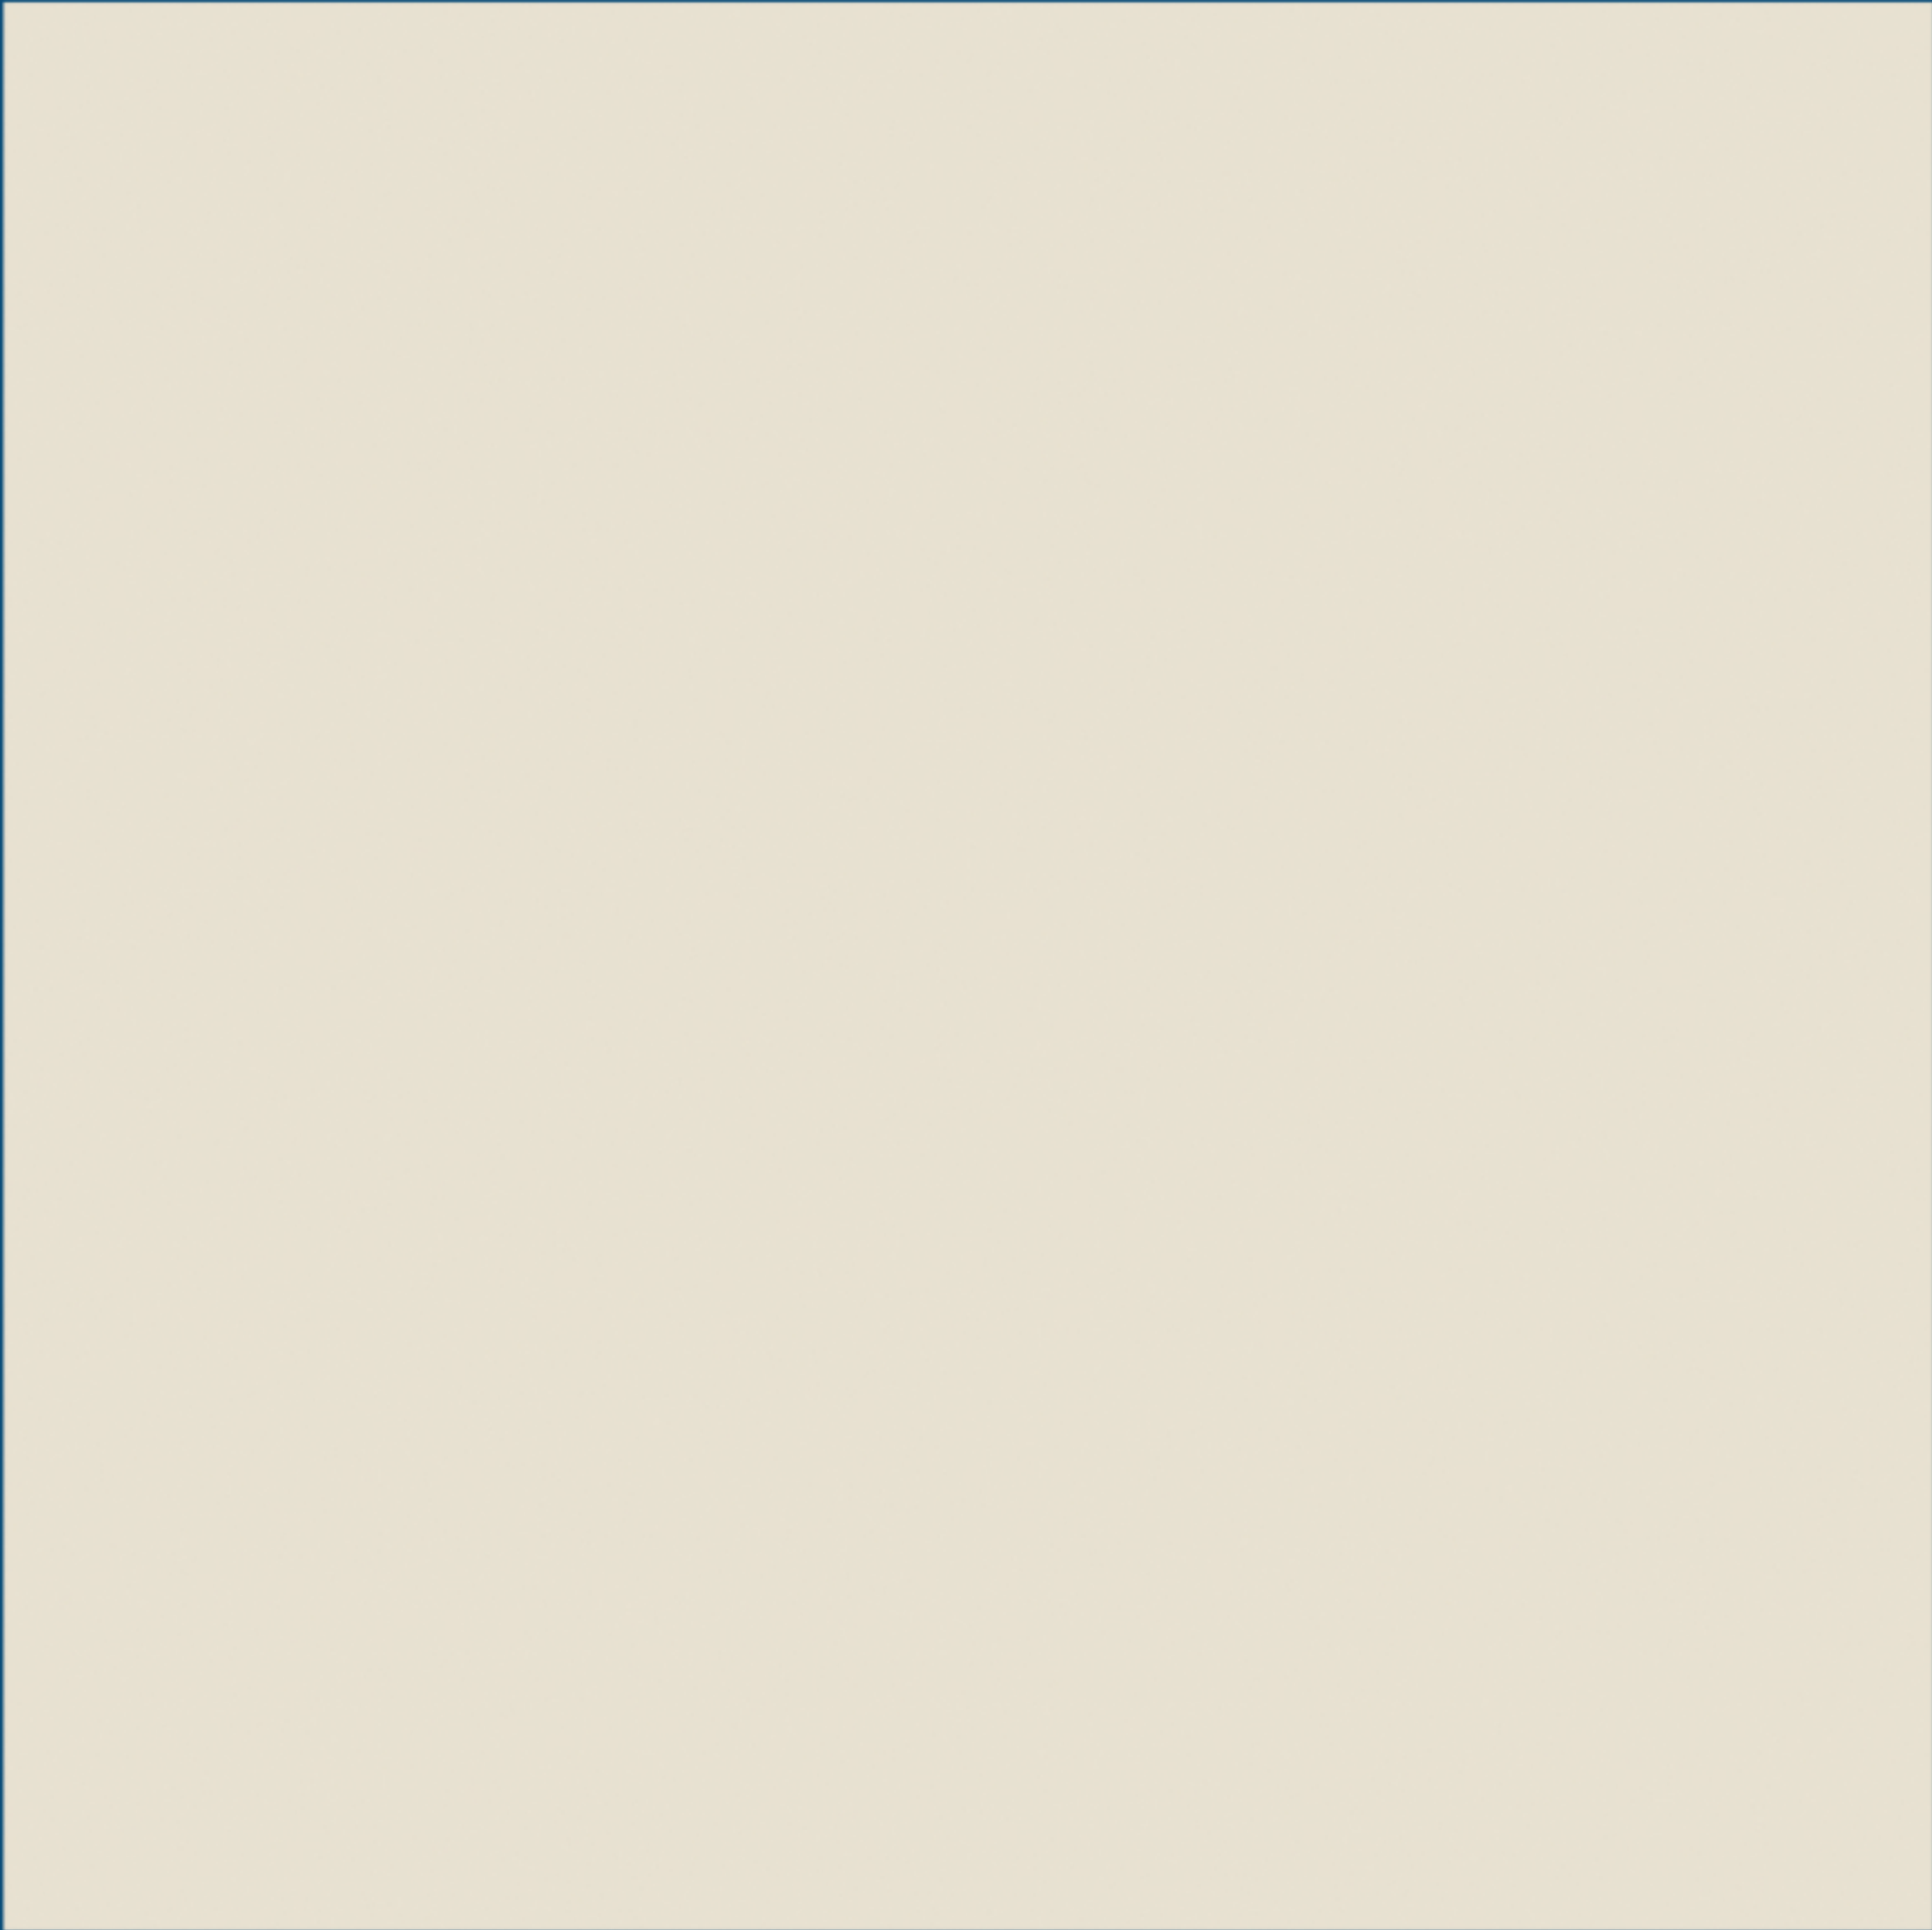

Design No

IVORY

NANO SOLUBLE SALT

60x60 CM | 24x24 IN | 4 Pcs/Box | 1,44 SqMt/Box



Floor Tile



Water
Resistance



Stain
Resistance



Indoor Use

TECHNICAL SPECIFICATION

NO.	PROPERTY	INTERNATIONAL Std. ISO 3006/EN 176 Group Bla	Our company	METHOD OF TESTING
1	Deviation in Length	±0.5 %	±0.1 %	EN 98
2	Deviation in Thickness	±0.5 %	±0.1 %	EN 98
3	Straightness of Sides	±0.5 %	±0.1 %	EN 98
4	Rectangularity	±0.5 %	±0.2 %	EN 98
5	Surface Flatness	±0.5 %	±0.2 %	EN 98
6	Water Absorption*	> 0.5%	> 0.03%	EN 99
7	Mohs Hardness*	> 6	> 8	EN 101
8	Flexural Straightness	> 27 N/mm ²	> 47 N/mm ²	EN 100
9	Abrasion Resistance	< 204 mm ³	< 144 mm ³	EN 102
10	Skid Resistance (Friction Coefficient)	< 0.4	< 0.6	ASTM C-1028
11	Breaking Strength*	1113 N	2830 N	ASTM C-648
12	Density (g/cc)	> 2	2.4	DIN 51082
13	Frost Resistance	Frost Proof	Frost Proof	EN 202
14	Chemical Resistance	No. Damage	No. Damage	EN 106
15	Thermal Shock Resistance	No. Damage	No. Damage	EN 104
16	Color Resistance	No. Damage	No. Damage	DIN 51094
17	Stain Resistance	Resistance	Resistance	ISO 10545-14
18	Moisture Resistance	Nil	Nil	ISO 10545-10
19	Glossiness	-----	Min 65%-70% Refiection	Glossmeter

PACKING DETAILS

SIZE	NO. OF TILES PER BOX	COVERAGE AREA
600 X 600 MM	4 PCS. / BOX	1.44 Sq. Mtr.

APPLICATION



Hospital



Super Market



Multiplex



Bank



Dance Mall



Industry



Home



Gymnasium



Airport



Religion Place



School



Hotel